

The logo for DONE, featuring the word "DONE" in a bold, teal, sans-serif font. The letter "D" is stylized with a white circular element on its left side. The logo is enclosed in a thin teal rounded rectangular border.

DONE

MXL Series LED Drivers

DL-40Z-A/P-MXL Spec. V1.1

Features

- Class I structure
- Input voltage:100-277V ~ 50/60Hz
- Efficiency :87%(Typ.)
- Function selection:
 Fixed current : Adjusted by external potentiometer (A version)
 Isolated 3-in-1 dimming: 0-10V/PWM/Resistor; Timer dimming (P version)
- Input surge protection: DM 4kV, CM 6kV
- All-Around protection: IUVP/IOVP/SCP/OVP/OTP
- Ingress protection rating: IP67
- Warranty: 5 years



Applications

- Road lighting
- Industrial lighting
- Stadium lighting
- Landscape lighting
- Horticulture lighting



Model list

| Model NO. | Input voltage | Output power | Output voltage | Output current | Default current | Eff. (Typ.) | THD (Typ.) | PF (Typ.) |
|----------------------------------|---------------|--------------|----------------|----------------|-----------------|-------------|------------|-----------|
| DL-40Z-56P-MXL DL-40Z-56A-MXL | 100-277Vac | 40W | 25-56Vdc | 0.45-1.34A | 0.9A | 87% | 10% | 0.95 |

Note:

1. Test conditions for the above parameters: At 100%Load 30 minutes,230 Vac;
2. The maximum output power is 40W ; please refer to the output power Vs. input voltage curve.



Input characteristics

| Parameter | Min | Typ. | Max | Note |
|---------------------|-------|---------|--------|---|
| Input voltage range | 90Vac | - | 305Vac | Refer to output power Vs. input voltage curve |
| Input frequency | 47Hz | 50/60Hz | 63Hz | |
| Power factor(PF) | 0.92 | 0.95 | - | At 100~240Vac and 70%~100% load |
| | 0.84 | 0.95 | - | At 277Vac and 70%~100% load |
| THD | - | 10% | 15% | At 100~277Vac and 70%~100% load |
| Input current | - | - | 0.5A | At 100Vac and 100% load |
| Inrush current | - | - | 70A | At 230Vac and 25°C cold start |

Output characteristic

| Parameter | Min | Typ. | Max | Note |
|------------------------------|-------|---------------|----------------|--|
| Efficiency | 84.0% | 85.0% | - | 100% load @100Vac, $I_o=0.72A$ |
| Efficiency | 84.0% | 87.0% | - | 100% load @230Vac, $I_o=0.72A$ |
| Efficiency | 84.0% | 87.5% | - | 100% load @277Vac, $I_o=0.72A$ |
| Output voltage range | 25Vdc | - | 56Vdc | 100%load output voltage range: 30-56Vdc |
| Open circuit voltage | - | - | 80Vdc | |
| Output current range | 0.45A | - | 1.34A | Default current is 0.9A |
| Output current tolerance | -5% | - | +5% | 100% load |
| Output Current Ripple(PK-AV) | - | 5% I_{omax} | 10% I_{omax} | 100%load, 20 MHz BW Ripple current = (Peak - Average) / Average |
| Start-up overshoot current | - | - | 10% | 100% load |
| Line regulation | -3% | - | +3% | 100% load |
| Load regulation | -3% | - | +3% | 60%-100% load |
| Turn-on delay time | - | - | 1.0s | 100% load@230Vac |

Note: The output current range is limited by the input and output voltage, please refer to I-V Work area curve

Dimming characteristic (P version)

| Dimming | Parameter | Min | Typ. | Max | Note |
|--------------------------------|---|-------|------|--------|---|
| 0-10V Dimming (Optional) | Safe operating voltage | 0V | - | 10V | On the Dim+ pin, Dim+ source current 150uA |
| | Dimming range | 10% | - | 100% | |
| | Recommended dimming input range | 0V | - | 10V | |
| | Turn-on voltage | 0.6V | 0.8V | 1.0V | |
| | Turn-off voltage | 0.4V | 0.5V | 0.6V | |
| PWM Dimming (Optional) | PWM in high level | 9.5V | - | 10.5V | |
| | PWM in low level | 0V | - | 0.3V | |
| | PWM in frequency scope | 300Hz | - | 2000Hz | - |
| | PWM in duty cycle | 1% | - | 99% | - |
| | Turn-on duty cycle | 6% | 8% | 10% | |
| | Turn-off duty cycle | 4% | 5% | 6% | |
| Resistor Dimming (Optional) | External resistor value | 10KΩ | - | 100KΩ | - |
| | Dimming range | 10% | - | 100% | Full power output at 99% duty cycle |
| Timer Dimming (Optional) | 3 modes:Timing,Virtual Midnight,Self-adaptive | | | | Default close, Set by the programmer |
| Output lumen compensation | Setting the output power with reference to the luminaire life | | | | Default close, Set by the programmer |

Note: The P version is 1-10V dimming (0V can be turned off). The maximum voltage of the dimming port is 12V. If the external power supply voltage exceeds 12V or the signal cable is inverted, the power supply will be damaged.

Protection

| Parameter | | Description | | | |
|---------------------------------------|----------------------------|---|--------|--------|--|
| Input Under Voltage Protection (IUVP) | Under Voltage Protection | 70Vac | 80Vac | 90Vac | Turn off the output when the input voltage falls below protection voltage |
| | Under Voltage Recovery | 75Vac | 85Vac | 95Vac | Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage. |
| Input Over Voltage Protection (IOVP) | Over Voltage Protection | 310Vac | 325Vac | 350Vac | Turn off the output when the input voltage exceeds protection voltage. |
| | Over Voltage Recovery | 300Vac | 315Vac | 330Vac | Auto Recovery. The driver will restart when the input voltage falls below recovery voltage. |
| | Max. of Input Over Voltage | - | - | 350Vac | The driver can survive input over voltage conditions of up to 350 Vac for a total of 8 hours without damage. |
| Output overload protection | | Hiccup mode, recovers automatically after fault condition is removed. | | | |
| Output short circuit protection | | Hiccup mode, recovers automatically after fault condition is removed | | | |
| Over temperature protection | | Self-recovery type, when the casing temperature is greater than 90°C, the output power decreases gradually. | | | |
| Output over-voltage protection | | Self-recovery type, automatically recovered after abnormal conditions are removed | | | |

Note: All parameters should be measured at a 230Vac/50Hz input voltage, with a rated load unless otherwise specified.

Environmental

| Categories | Parameter |
|--|--|
| Operating temperature Ta | -40°C ~ +45°C@100-199Vac -40°C ~ +55°C@200-277Vac |
| Operating case temperature for Safety Tc_s | -40°C ~ +90°C |
| Operating case temperature for Warranty Tc_w | -40°C ~ +75°C, 10% ~ 95% RH |
| Storage temperature, humidity | -40°C ~ +80°C, 10% ~ 95% RH |
| Resistant to vibration | 10Hz ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each |
| MTBF | 200,000 hours (MIL-HDBK-217F), Ta=25°C, 230Vac, 80% load |
| Lifetime | 50,000 hours @Tc≤75°C, 230Vac, 80% Load |

Safety

| Safety Categories | Area | Standards | Approved |
|-------------------|-----------------|---|----------|
| CCC | China | GB/T 19510.1,GB/T 19510.213 | √ |
| CE | Europe | EN 61347-1, EN 61347-2-13 | √ |
| ENEC | | EN 62384 | √ |
| CB | CB member state | IEC 61347-1, IEC 61347-2-13 | √ |
| SAA | Australia | AS/NZS 61347.1, AS/NZS 61347.2.13 | √ |
| UL | USA | UL 8750 | √ |
| CUL | Canada | CSA C22.2 No.250.13 | √ |
| EAC | Russia | ГОСТ 61347-1-2019;2-13-2013 ГОСТ IEC 61547-2013 ГОСТ 6800-3-2-2017 ГОСТ CISPR 15-2014 ГОСТ IEC 61000-3-3-2015 | √ |
| BIS | India | IS 15885(PART 2/SEC 13) | |

EMC

| EMI/EMS Categories | Area | Standards | Approved |
|--------------------|--------|--|----------|
| CCC | China | GB/T 17743, GB 17625.1 | √ |
| CE | Europe | EN IEC 55015 EN 61547 EN IEC 61000-3-2;3-3;4-5 | √ |
| FCC | USA | FCC Part 15 Subpart B | √ |

RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

Safety Test Items:

| Safety Test Item | UL | CE/CB/ENEC | CCC | Note |
|-----------------------|---------|------------|---------|-------------------------------|
| Input-output | 1600Vac | 3200Vac | 3200Vac | |
| Input-Case/Ground | 1600Vac | 1600Vac | 1600Vac | |
| Input-Dim | 1600Vac | 3200Vac | 3200Vac | |
| Output-Case/Ground | 1160Vac | 1160Vac | 1160Vac | |
| Output-Dim | 1160Vac | 2320Vac | 2320Vac | |
| Dim-Case | 500Vac | 500Vac | 500Vac | |
| Insulation Resistance | ≥10MΩ | | | Input-Dim,Test voltage:500Vdc |
| Ground Resistance | ≤0.1Ω | | | 25A/1min;Ta=25°C±10°C |
| Leakage current | 0.70mA | | | IEC 60598-1; 277Vac/60Hz |


Note: The driver is considered as a component that will be operated in combination with the final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

I-V Working area

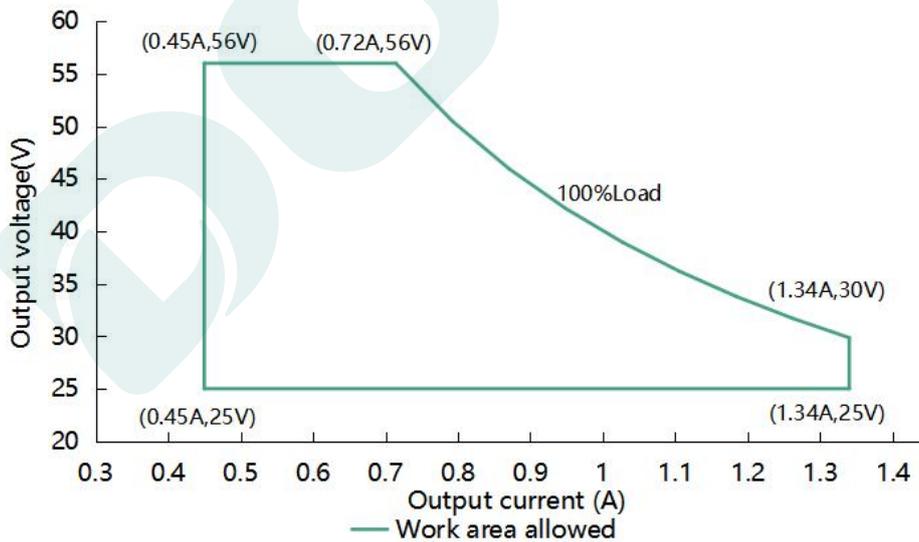


| Load | Output parameter | | | | | | | | |
|----------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Output Voltage | 25V | 28V | 32V | 36V | 40V | 43V | 48V | 52V | 56V |
| Output Current | 1.34A | 1.34A | 1.25A | 1.11A | 1.00A | 0.93A | 0.83A | 0.77A | 0.72A |
| Output Power | 33.5W | 37.5W | 40.0W |

Inrush current

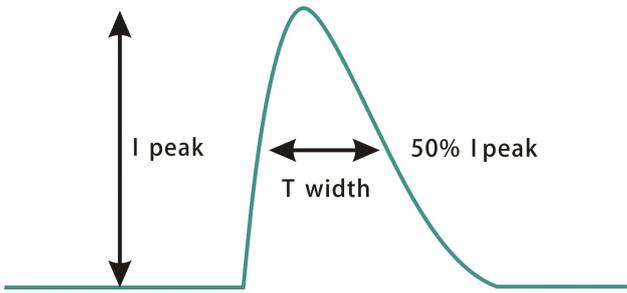


| Input voltage | Peak current | T(@50% Peak current) |
|---------------|--------------|----------------------|
| 100Vac | 40.0A | 188us |
| 230Vac | 44.0A | 188us |
| 277Vac | 50.0A | 206us |


Output power vs. Input voltage

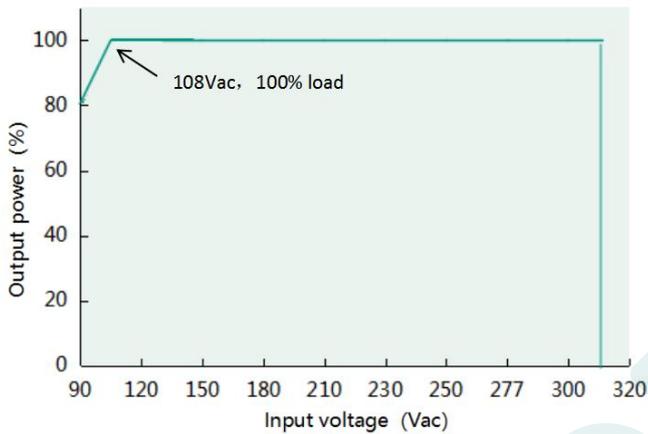


Eff. vs. Load ($I_o=0.72A$)

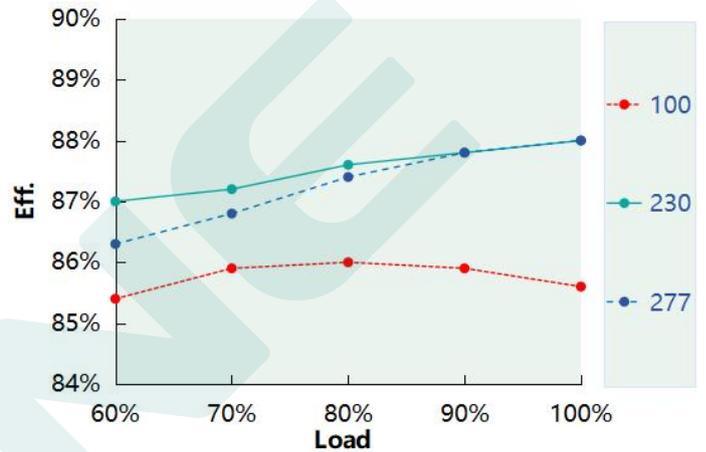


Power factor vs. Load

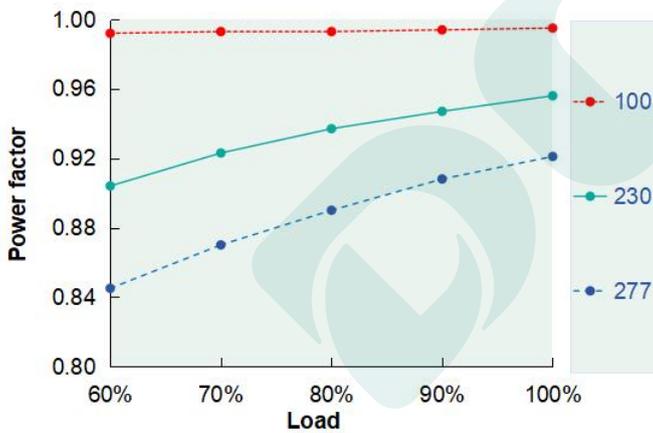


THD vs. Load

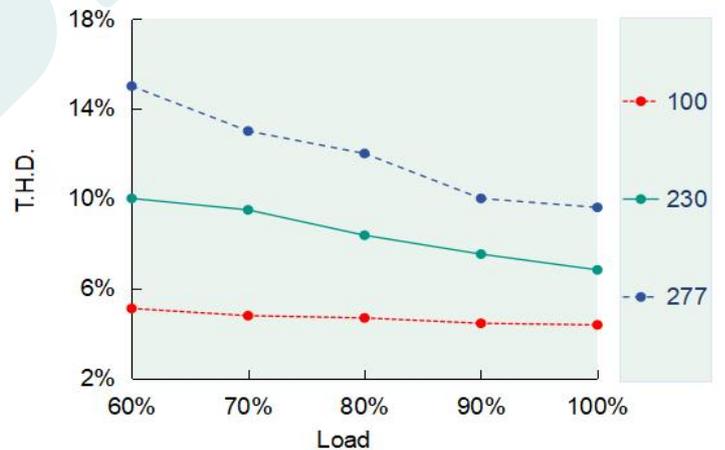

Lifetime vs. Tcase

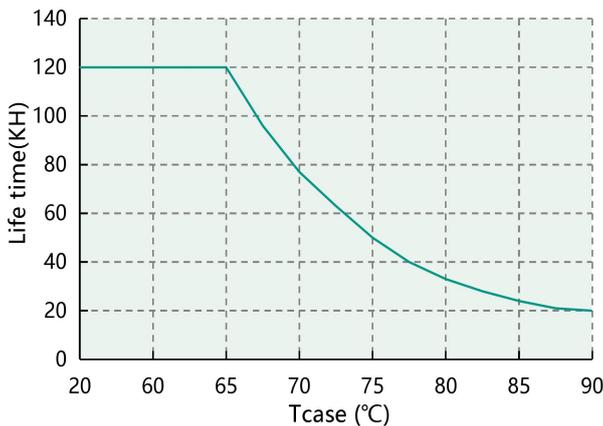

Output power vs. Tcase

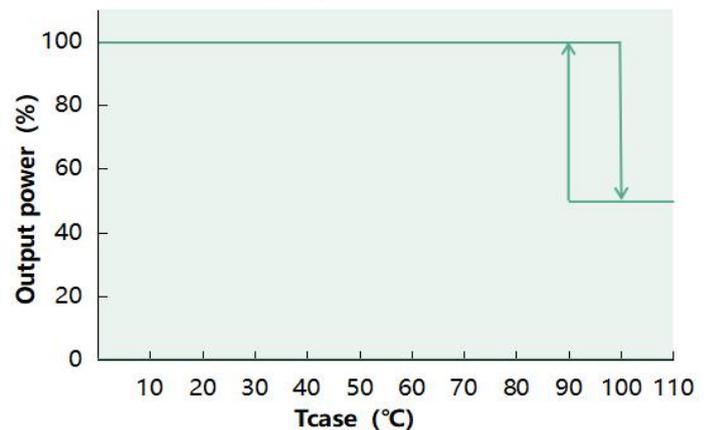

All performance parameters are typical values measured at 25°C, unless otherwise specified.





Dimming operation



3-in-1 dimming function (P version only)

Connect a 0-10V Dimmer or 10V PWM signal or resistor between DIM+ and DIM-.



0-10V dimming:

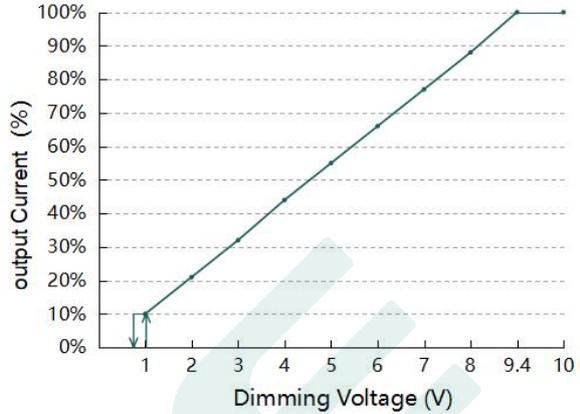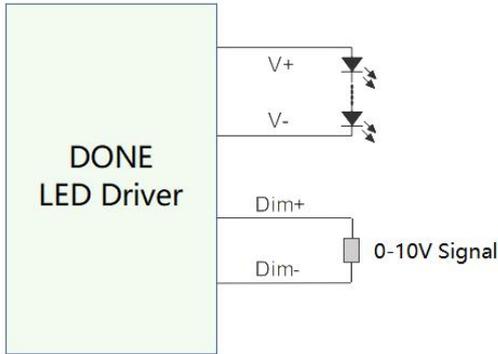

PWM dimming:

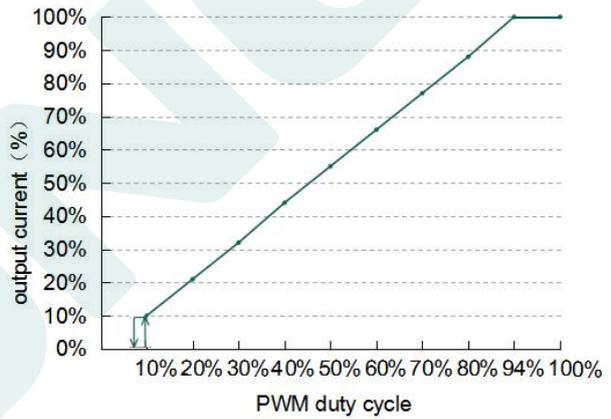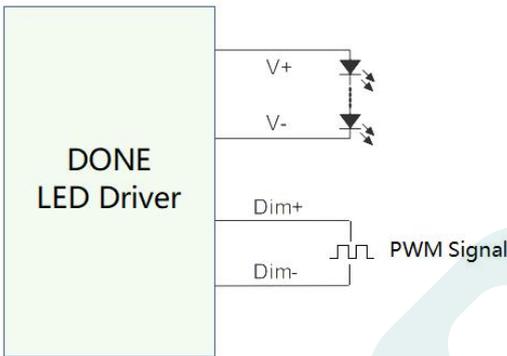

Resistor Dimming:

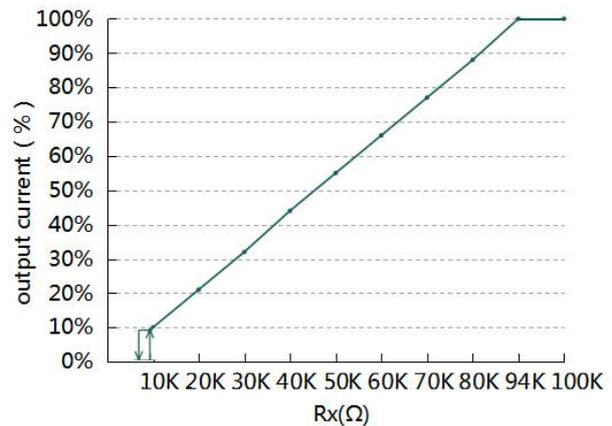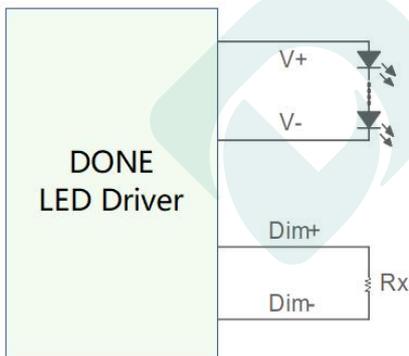

Remark:

1. Positive and negative logic dimming can be programmed.
2. Dimming-off only applies to positive logic.

Programmable Connections

Suitable for MXG, MXL, MXC, MXS, MAS, PXS Series.


Mode 1



visual programming

1. Set the output parameters through the control signal line, set the output current and 0-5V/0-10V/3-in-1/PWM optional.
2. Timer dimming, Traditional/Self-adaptive midnight/Self-adaptive percentage optional, support up to 6 segments;
3. Set output output lumen compensation(OLC);
4. Set the lifetime warning
5. Set the OTP parameter
6. After setting is completed, then click the Save button, download it to the offline programmer and the driver setup is complete.

Mode 2

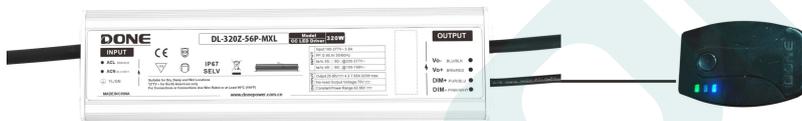

Off-line programmable :


1. Download the program to the programmer;
2. Connect the dimming wire with the programmer, press the programmer button , the programmer will give you a Beep and indicator light turns green to tell you the installation completed.

For more details, Please see the [“DONE POWER OFFLINE PROGRAMMING TOOL V2.0 ” file.](#)


Mechanical specification

Size (mm) L105*W53*H33

DL-40Z-56P-MXL

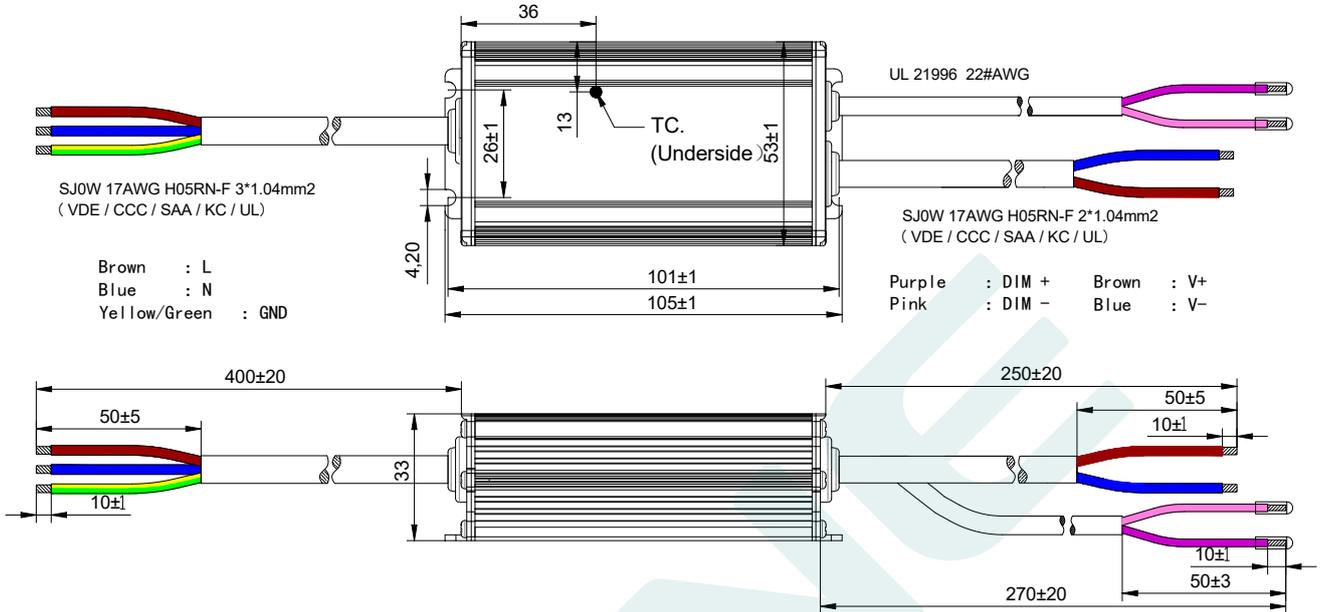

DL-40Z-56A-MXL

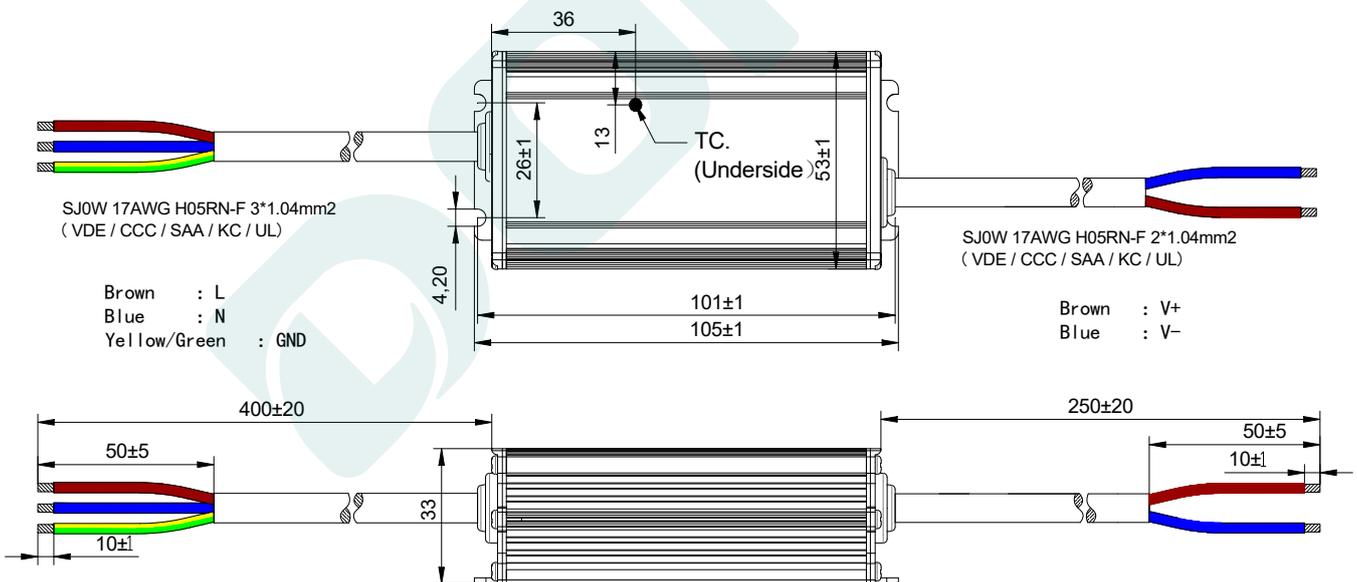


Weight

Weight 376g

Packaging

| | |
|----------------|----------------|
| Packaging (mm) | L475*W350*H205 |
|----------------|----------------|

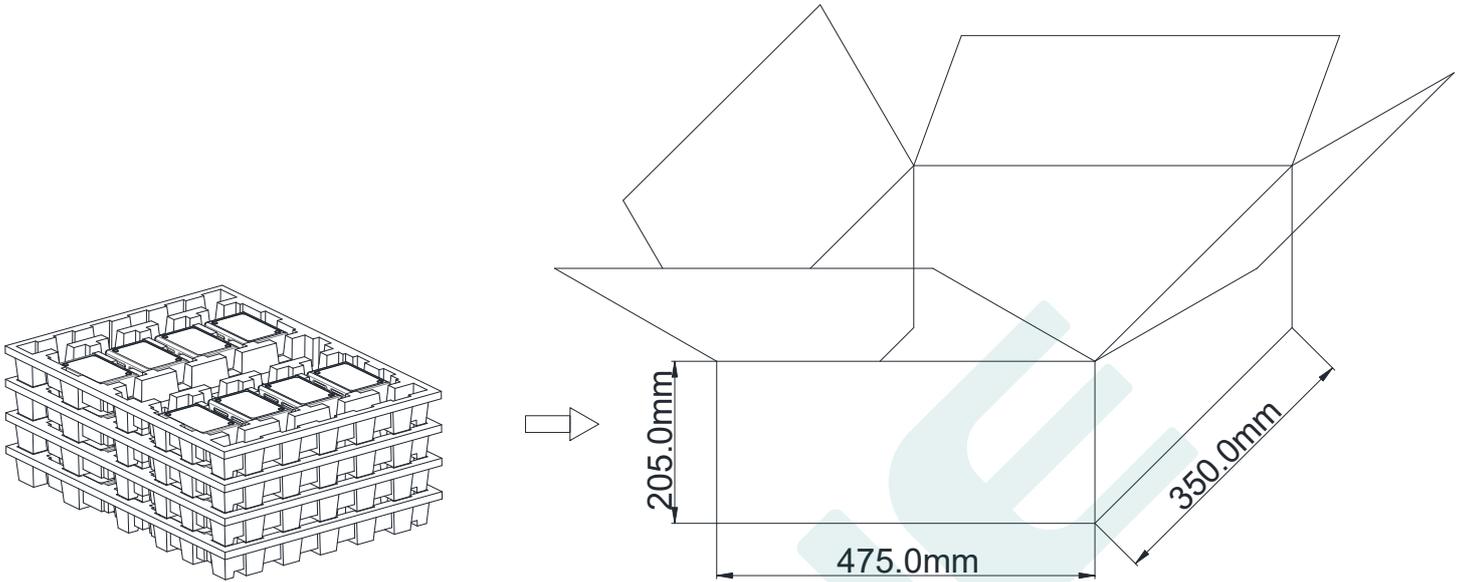

Note: One Carton 4 layers and 8 pcs each layer, total 32pcs/carton.

Note:

1. According to the certificate obtained by the LED DRIVER, the LED DRIVER with the English label is sold in Europe, America and India.
2. The LED DRIVER with Chinese label is only used for China market.

Version

| DATE | DESCRIPTION | REV. | CHECK |
|-----------|---|------|-------|
| 2025.4.25 | Initial version. | V1.0 | |
| 2026.1.10 | 1. Adjust the input under-voltage protection description and the "output power vs. input voltage" chart 2. Increase input overvoltage protection description | V1.1 | |
| | | | |
| | | | |
| | | | |
| | | | |

MANUFACTURER

EDIT

CHECK

APPROVE