

MXL Series LED Drivers

DL-150Z-A/P-MXL Specification V1.5

Features

- Class I structure
- Input voltage: 100-277 V ~ 50/60 Hz
- Efficiency: 92%(Typ.)
- Function selection:

Fixed current : Adjusted by external potentiometer (A version)

Isolated 3-in-1 dimming: 0-10V/PWM/Resistor; Timer dimming (P version)

- Input surge protection: DM 6kV, CM 10kV
- All-Around protection: IUVP/IOVP/SCP/OVP/OTP
- Ingress protection rating: IP67
- Warranty: 5 years



Applications

- Road lighting
- Industrial lighting
- Stadium lighting
- Landscape lighting
- Horticulture lighting



Model list

Model NO.	Input voltage	Output power	Output voltage	Output current	Default current	Eff. (Typ.)	THD (Typ.)	PF (Typ.)
DL-150Z-56P-MXL DL-150Z-56A-MXL	100-277Vac	150W	25-56Vdc	1.7-4.2A	4.2A	91.3%	7%	0.97
DL-150Z-107P-MXL DL-150Z-107A-MXL	100-277Vac	150W	48-107Vdc	1.4-2.1A	1.9A	92%	7%	0.97
DL-150Z-214P-MXL DL-150Z-214A-MXL	100-277Vac	150W	95-214Vdc	0.5-1.05A	0.7A	92%	7%	0.97

Note :

1. Test conditions for the above parameters: At 100%Load 30 minutes,230 Vac;
2. The maximum output power is 150W ; please refer to the output power Vs. input voltage curve.



Input characteristics

Parameter	Min	Typ.	Max	Note
Input voltage range	90Vac		305Vac	Refer to output power Vs. input voltage curve
Input frequency	47Hz	50/60Hz	63Hz	
Power factor(PF)	0.94	0.97	-	At 100~240Vac and 70%~100% load
	0.9	0.95		At 277Vac and 70%~100% load
THD	-	7%	10%	At 100~277Vac and 70%~100% load
Input current	-	-	1.9A	At 100Vac and 100% load
Inrush current	-	-	85A	At 230Vac and 25°C cold start

Output characteristic

Parameter	Min	Typ.	Max	Note
Efficiency				100% load @100Vac
DL-150Z-56A/P-MXL	86.0%	87.0%	-	Io=2.68A
DL-150Z-107A/P-MXL	86.5%	88.0%		Io=1.4A
DL-150Z-214A/P-MXL	86.5%	88.0%		Io=0.7A
Efficiency				100% load @230Vac
DL-150Z-56A/P-MXL	90.0%	91.0%	-	Io=2.68A
DL-150Z-107A/P-MXL	91.5%	92.5%		Io=1.4A
DL-150Z-214A/P-MXL	91.5%	92.5%		Io=0.7A
Efficiency				100% load @277Vac
DL-150Z-56A/P-MXL	90.3%	91.3%	-	Io=2.68A
DL-150Z-107A/P-MXL	92.5%	93.0%		Io=1.4A
DL-150Z-214A/P-MXL	92.5%	93.0%		Io=0.7A
Output voltage range				100%load output voltage range:
DL-150Z-56A/P-MXL	25V	-	56V	36-56V
DL-150Z-107A/P-MXL	48V	-	107V	71-107V
DL-150Z-214A/P-MXL	95V	-	214V	143-214V
Open circuit voltage				
DL-150Z-56A/P-MXL	-	-	65V	
DL-150Z-107A/P-MXL			150V	
DL-150Z-214A/P-MXL			260V	
Output current range				Default current is:
DL-150Z-56A/P-MXL	1.7A	-	4.2A	4.2A
DL-150Z-107A/P-MXL	1.4A	-	2.1A	1.9A
DL-150Z-214A/P-MXL	0.5A	-	1.05A	0.7A

Output characteristic

Parameter	Min	Typ.	Max	Note
Output current tolerance	-5%	-	+5%	100% load
Output Current Ripple(PK-AV)	-	5% Iomax	10% Iomax	100%load , 20 MHz BW Ripple current = (Peak - Average) / Average
Start-up overshoot current	-	-	10%	100% load
Line regulation	-5%	-	+5%	100% load
Load regulation	-5%	-	+5%	60%-100% load
Turn-on delay time	-	-	1.0s	100% load@230Vac

Note: The output current range is limited by the input and output voltage, please refer to I-V Work area curve

Dimming characteristic (P version)

Dimming	Parameter	Min	Typ.	Max	Note
0-10V Dimming (Optional)	Safe operating voltage	0V	-	10V	On the Dim+ pin, Dim+ source current 150uA
	Dimming range	10%	-	100%	
	Recommended dimming input range	0V	-	10V	
	Turn-on voltage	0.6V	0.8V	1.0V	
	Turn-off voltage	0.4V	0.5V	0.6V	
PWM Dimming (Optional)	PWM in high level	9.5V	-	10.5V	
	PWM in low level	0V	-	0.3V	
	PWM in frequency scope	300Hz	-	2000Hz	-
	PWM in duty cycle	1%	-	99%	-
	Turn-on duty cycle	6%	8%	10%	
	Turn-off duty cycle	4%	5%	6%	
Resistor Dimming (Optional)	External resistor value	10KΩ	-	100KΩ	-
	Dimming range	10%	-	100%	Full power output at 99% duty cycle
Timer Dimming (Optional)	3 modes:Timing,Virtual Midnight,Self-adaptive				Default close, Set by the programmer
Output lumen compensation	Setting the output power with reference to the luminaire life				Default close, Set by the programmer

Note: The P version is 1-10V dimming (0V can be turned off). The maximum voltage of the dimming port is 12V. If the external power supply voltage exceeds 12V or the signal cable is inverted, the power supply will be damaged.

Protection

Parameter					Description
Input Under Voltage Protection (IUVP)	Under Voltage Protection	70Vac	80Vac	90Vac	Turn off the output when the input voltage falls below protection voltage
	Under Voltage Recovery	75Vac	85Vac	95Vac	Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage.
Input Over Voltage Protection (IOVP)	Over Voltage Protection	310Vac	325Vac	350Vac	Turn off the output when the input voltage exceeds protection voltage.
	Over Voltage Recovery	300Vac	315Vac	330Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	-	-	350Vac	The driver can survive input over voltage conditions of up to 350 Vac for a total of 8 hours without damage.
Output overload protection		Hiccup mode , recovers automatically after fault condition is removed.			
Output short circuit protection		Hiccup mode , recovers automatically after fault condition is removed			
Over temperature protection		Self-recovery type , when the casing temperature is greater than 90°C, the output power decreases gradually.			
Output over-voltage protection		Self-recovery type, automatically recovered after abnormal conditions are removed			

Note: All parameters should be measured at a 230Vac/50Hz input voltage, with a rated load unless otherwise specified.

Environmental

Categories	Parameter
Operating temperature Ta	-40°C ~ +45°C@100-199Vac -40°C ~ +55°C@200-277Vac
Operating case temperature for Safety Tc_s	-40°C ~ +90°C
Operating case temperature for Warranty Tc_w	-40°C ~ +75°C, 10% ~ 95% RH
Storage temperature, humidity	-40°C ~ +80°C, 10% ~ 95% RH
Resistant to vibration	10Hz ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each
MTBF	200,000 hours (MIL-HDBK-217F), Ta=25°C, 230Vac, 80% load
Lifetime	50,000 hours @Tc≤75°C, 230Vac, 80% Load

Safety

Safety Categories	Area	Standards	Approved
CCC	China	GB/T 19510.1,GB/T 19510.213	√
CE	Europe	EN 61347-1, EN 61347-2-13	√
ENEC		EN 62384	√
CB	CB member state	IEC 61347-1, IEC 61347-2-13	√
SAA	Australia	AS/NZS 61347.1, AS/NZS 61347.2.13	√
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
EAC	Russia	ГОСТ 61347-1-2019;-2-13-2013 ГОСТ IEC 61547-2013 ГОСТ 6800-3-2-2017 ГОСТ CISPR 15-2014 ГОСТ IEC 61000-3-3-2015	√
BIS	India	IS 15885(PART 2/SEC 13)	

EMC

EMI/EMS Categories	Area	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN IEC 55015 EN 61547 EN IEC 61000-3-2;3-3;4-5	√
FCC	USA	FCC Part 15 Subpart B	√

RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

Safety Test Items:


Safety Test Item	UL	CE/CB/ENEC	CCC	Note
Input-output	1600Vac	3200Vac	3200Vac	
Input-Case/Ground	1600Vac	1600Vac	1600Vac	
Input-Dim	1600Vac	3200Vac	3200Vac	
Output-Case/Ground				
DL-150Z-56A/P-MXL	500Vac	500Vac	500Vac	
DL-150Z-107A/P-MXL	1300Vac	1300Vac	1300Vac	
DL-150Z-214A/P-MXL	1520Vac	1520Vac	1520Vac	
Output-Dim				
DL-150Z-56A/P-MXL	1130Vac	500Vac	500Vac	
DL-150Z-107A/P-MXL	1300Vac	2600Vac	2600Vac	
DL-150Z-214A/P-MXL	1520Vac	3040Vac	3040Vac	
Dim-Case	500Vac	500Vac	500Vac	
Insulation Resistance	$\geq 10M\Omega$			Input-Dim, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$			25A/1min; Ta=25°C±10°C
Leakage current	0.70mA			IEC 60598-1; 277Vac/60Hz

Note: The driver is considered as a component that will be operated in combination with the final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

I-V Working area

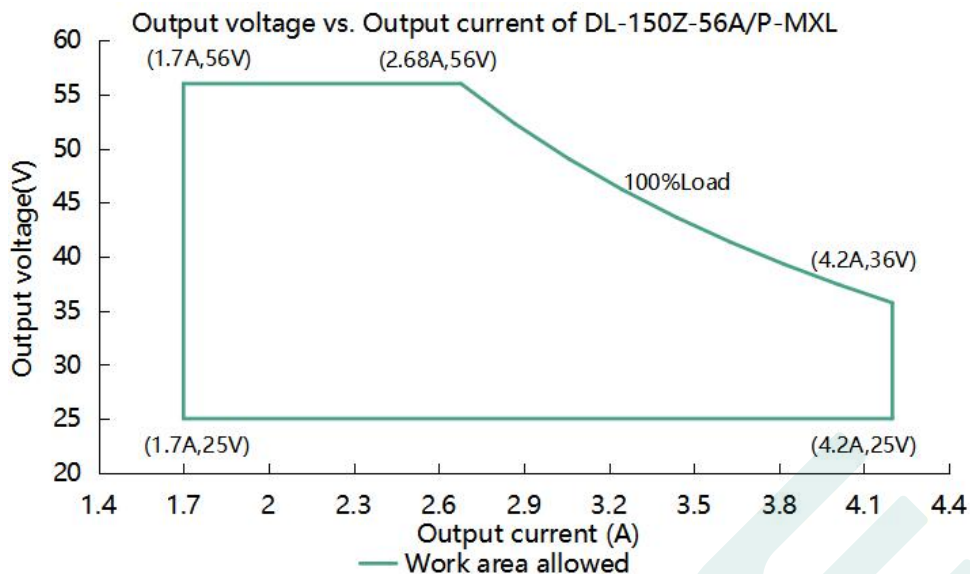


Load	Output								
Output Voltage	25V	29V	33V	36V	40V	44V	48V	52V	56V
Output Current	4.20A	4.20A	4.20A	4.20A	3.75A	3.41A	3.13A	2.88A	2.68A
Output Power	105.0W	121.8W	138.6W	150.0W	150.0W	150.0W	150.0W	150.0W	150.0W

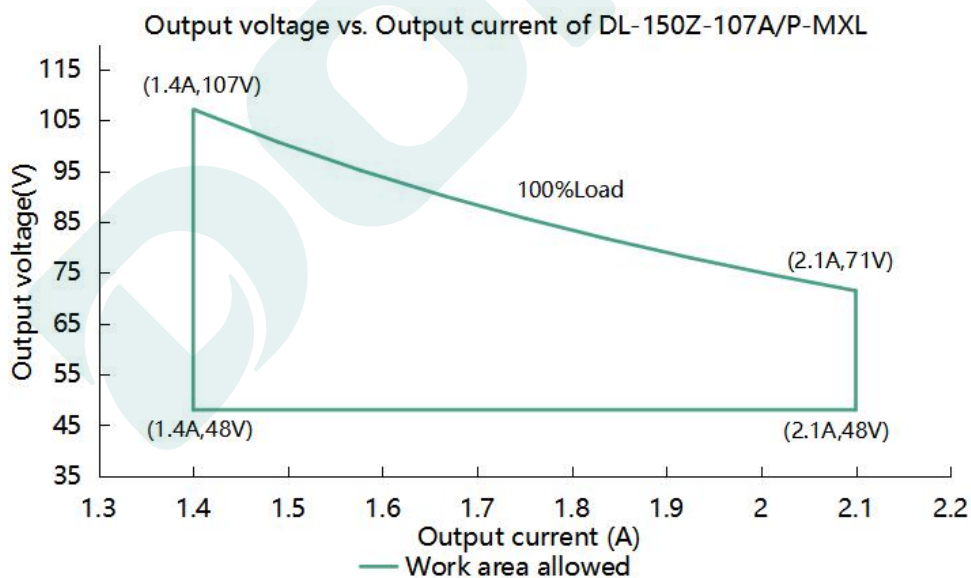


Load	Output								
Output Voltage	48V	56V	64V	71V	80V	88V	96V	104V	107V
Output Current	2.10A	2.10A	2.10A	2.10A	1.88A	1.70A	1.56A	1.44A	1.40A
Output Power	100.8W	117.6W	134.4W	149.1W	150.0W	150.0W	150.0W	150.0W	150.0W

I-V Working area

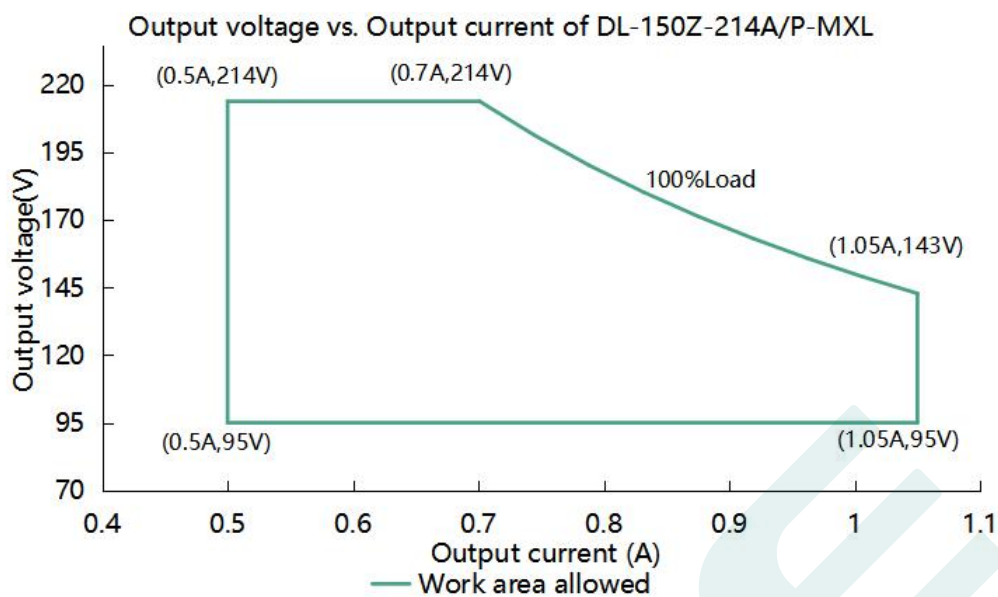


Load	Output								
Load working Voltage	95V	120V	135V	143V	165V	180V	190V	200V	214V
Io_MAX	1.05A	1.05A	1.05A	1.05A	0.91A	0.83A	0.79A	0.75A	0.70A
Po_MAX	99.8W	126.0W	141.8W	150.0W	150.0W	150.0W	150.0W	150.0W	150.0W

Inrush current

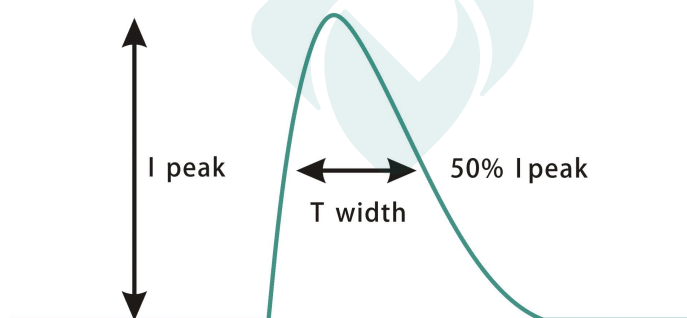


Input voltage	Peak current	T(@50% Peak current)
100Vac	23A	288us
230Vac	56A	292us
277Vac	68A	308us


Output power vs. Input voltage (DL-150Z-MXL)

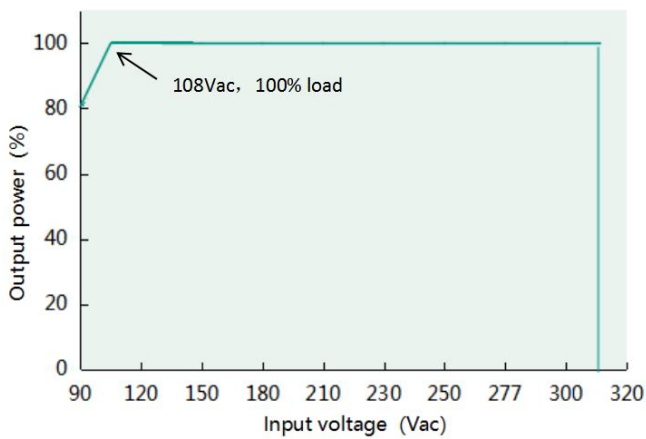


Eff. vs. Load (DL-150Z-56A/P-MXL) (Io=2.68A)

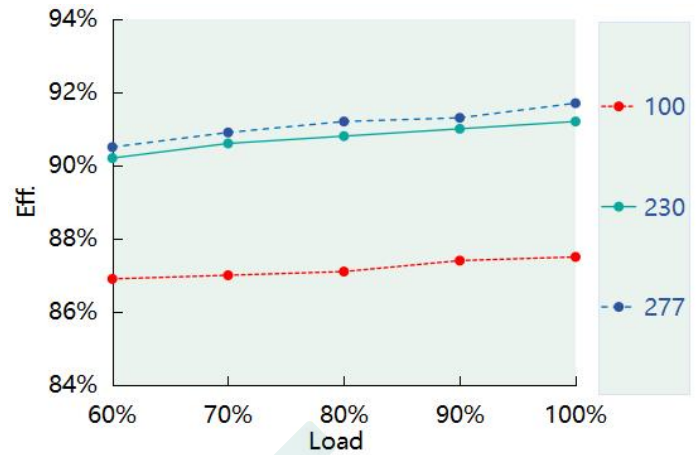


Eff. vs. Load (DL-150Z-107A/P-MXL) (Io=1.4A)

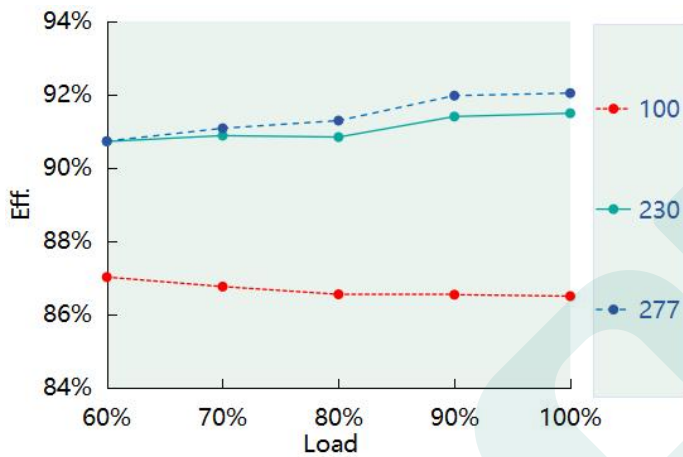


Eff. vs. Load (DL-150Z-214A/P-MXL) (Io=0.7A)

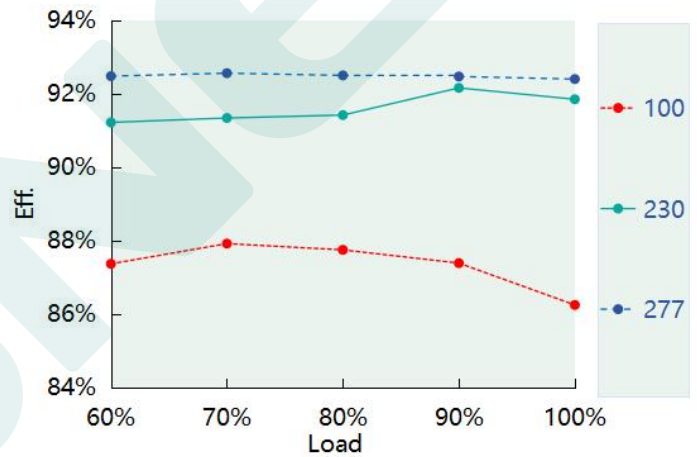


Power Factor vs. Load (DL-150Z-56A/P-MXL)

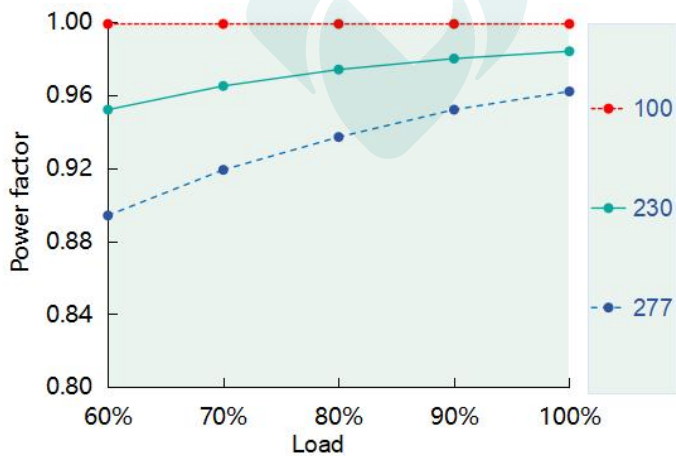


Power Factor vs. Load (DL-150Z-107A/P-MXL)

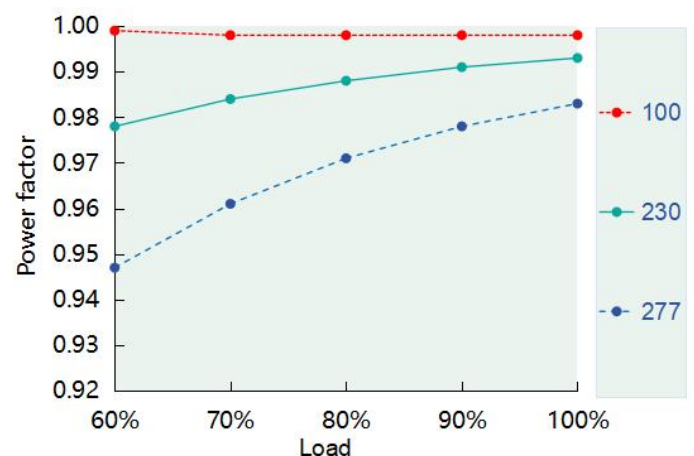


Power Factor vs. Load (DL-150Z-214A/P-MXL)

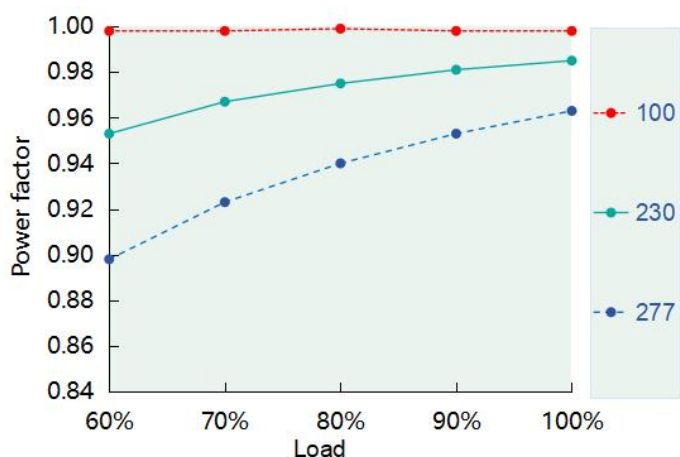


THD vs. Load (DL-150Z-56A/P-MXL)

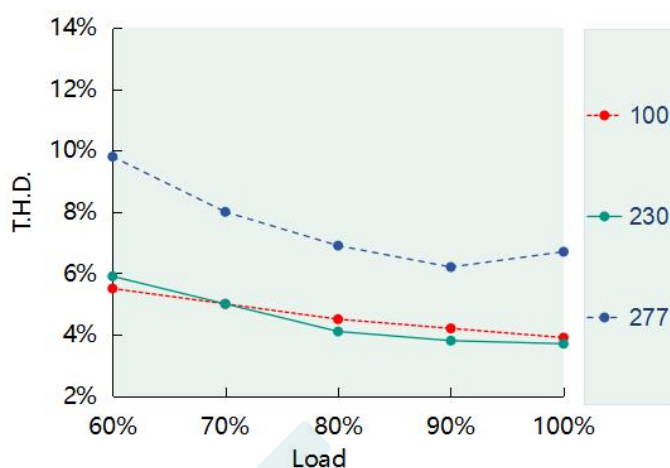


THD vs. Load (DL-150Z-107A/P-MXL)

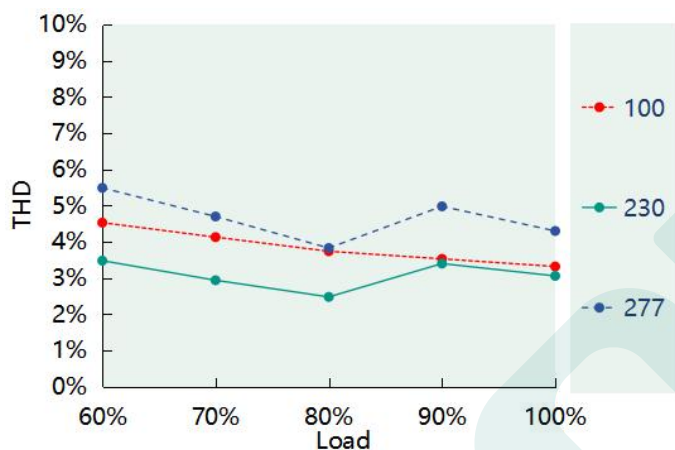


THD vs. Load (DL-150Z-214A/P-MXL)

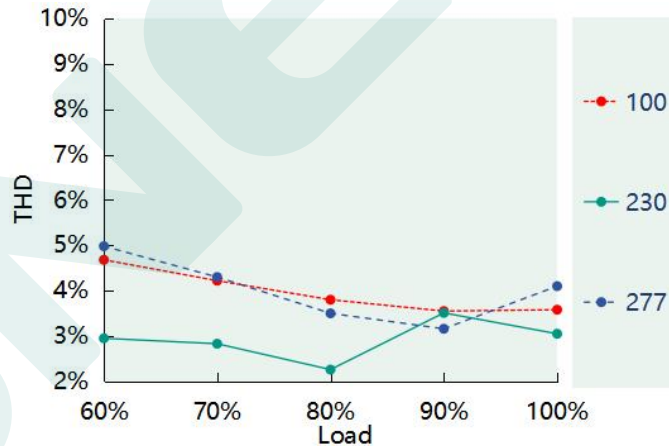

Lifetime vs. Tcase (DL-150Z-MXL)

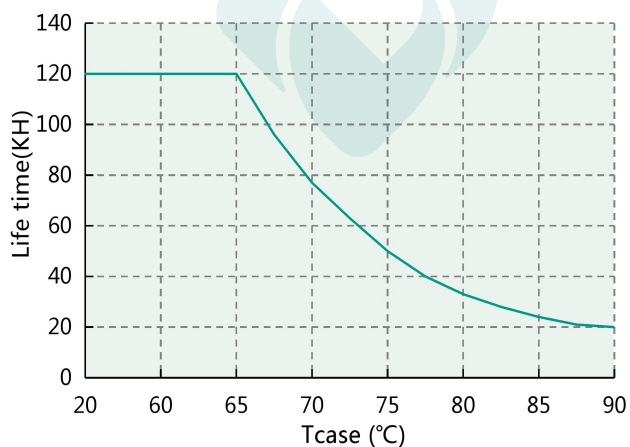

Output power vs. Tcase (DL-150Z-MXL)


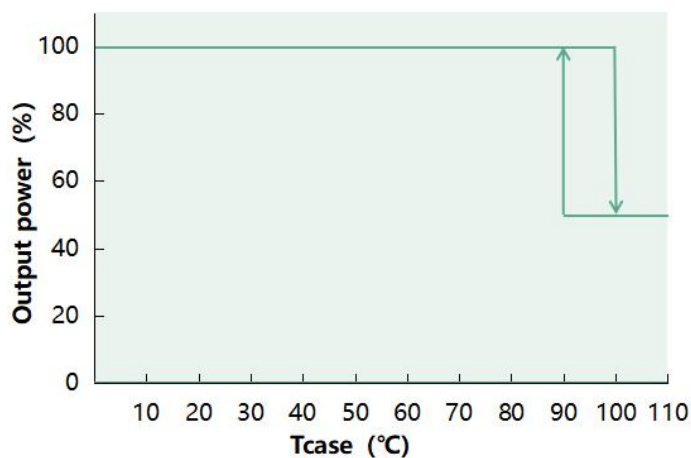


Dimming operation



3-in-1 dimming function (P version only)

Connect a 0-10V Dimmer or 10V PWM signal or resistor between DIM+ and DIM-.



• 0-10V dimming:

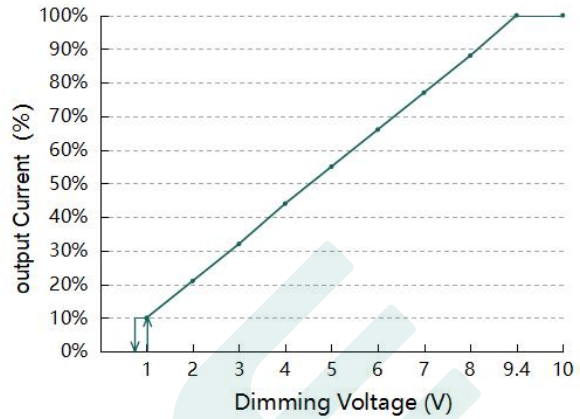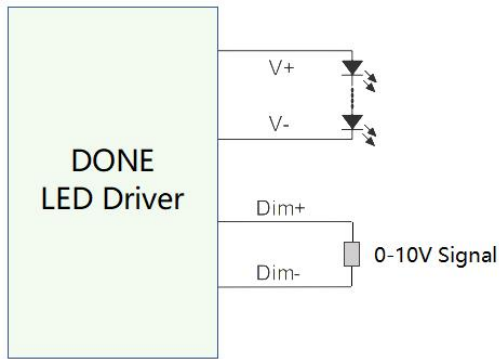

• PWM dimming :

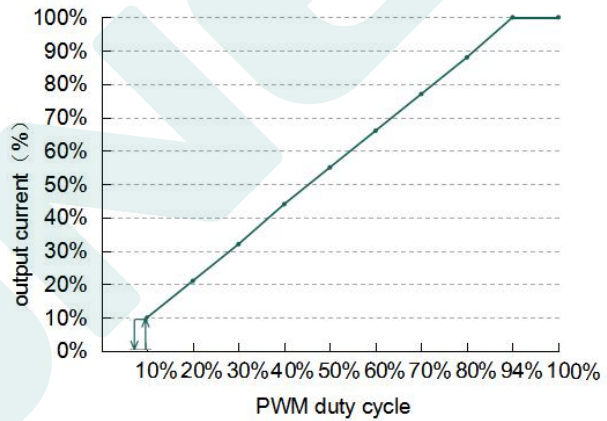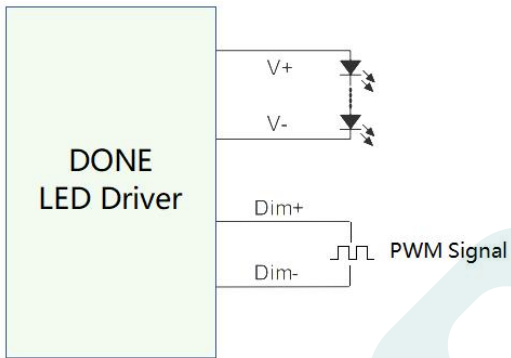

• Resistor Dimming:

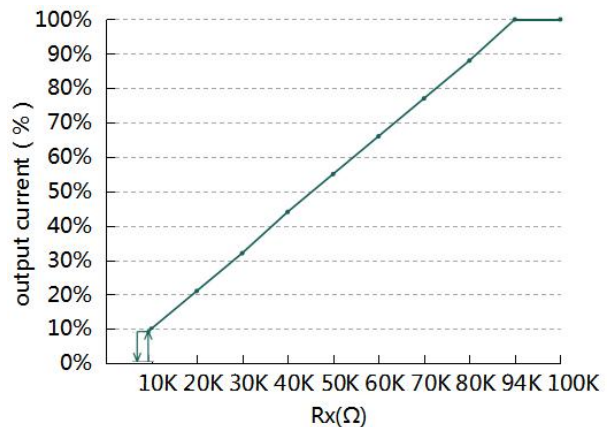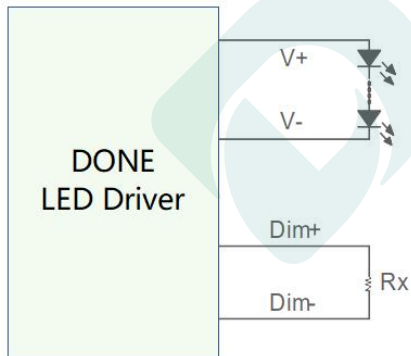

Remark:

1. Positive and negative logic dimming can be programmed.
2. Dimming-off only applies to positive logic.

Programmable Connections

Suitable for MXG, MXL, MXC, MXS, MAS, PXS Series.


Mode 1



Visual Programming

1. Set the output parameters through the control signal line, set the output current and 0-5V/0-10V/3-in-1/PWM optional.
2. Timer dimming, Traditional/Self-adaptive midnight/Self-adaptive percentage optional, support up to 6 segments;
3. Set output output lumen compensation (OLC);
4. Set the lifetime warning
5. Set the OTP parameter
6. After setting is completed, then click the Save button, download it to the offline programmer and the driver setup is complete.

Mode 2

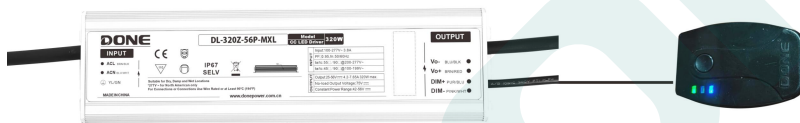

Off-line programmable :


1. Download the program to the programmer;
2. Connect the dimming wire with the programmer, press the programmer button , the programmer will give you a Beep and indicator light turns green to tell you the installation completed.

For more details, Please see the “[DONE POWER OFFLINE PROGRAMMING TOOL V2.0](#) “ file.


Mechanical specification

Size (mm) L165*W63*H33

DL-150Z-56A/107A/214A-MXL

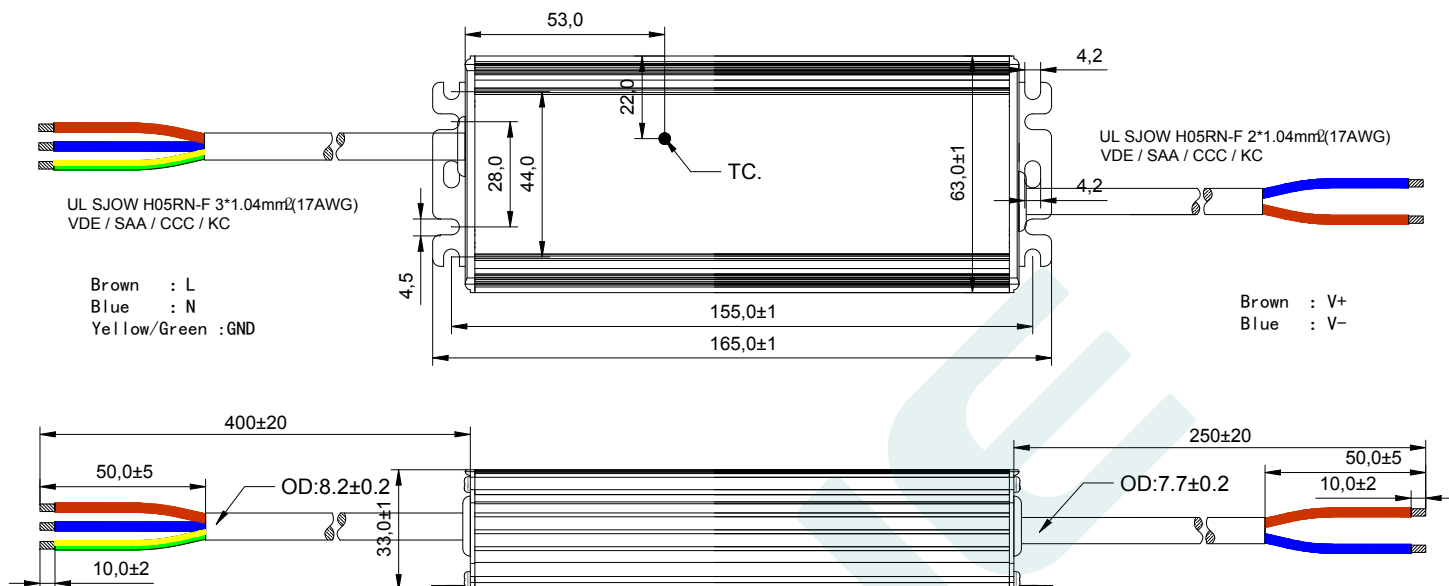

DL-150Z-56P/107P/214P-MXL

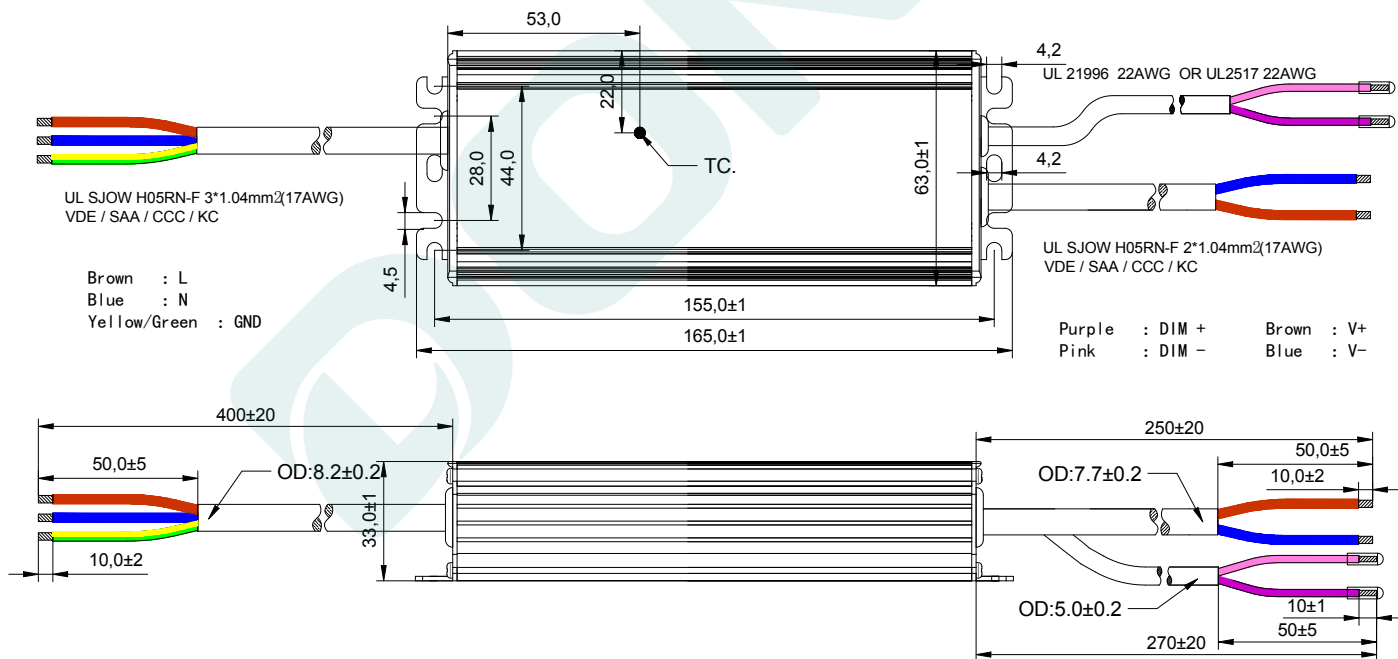


Weight

Weight 675 g

Packaging

Packaging (mm) L475*W350*H160

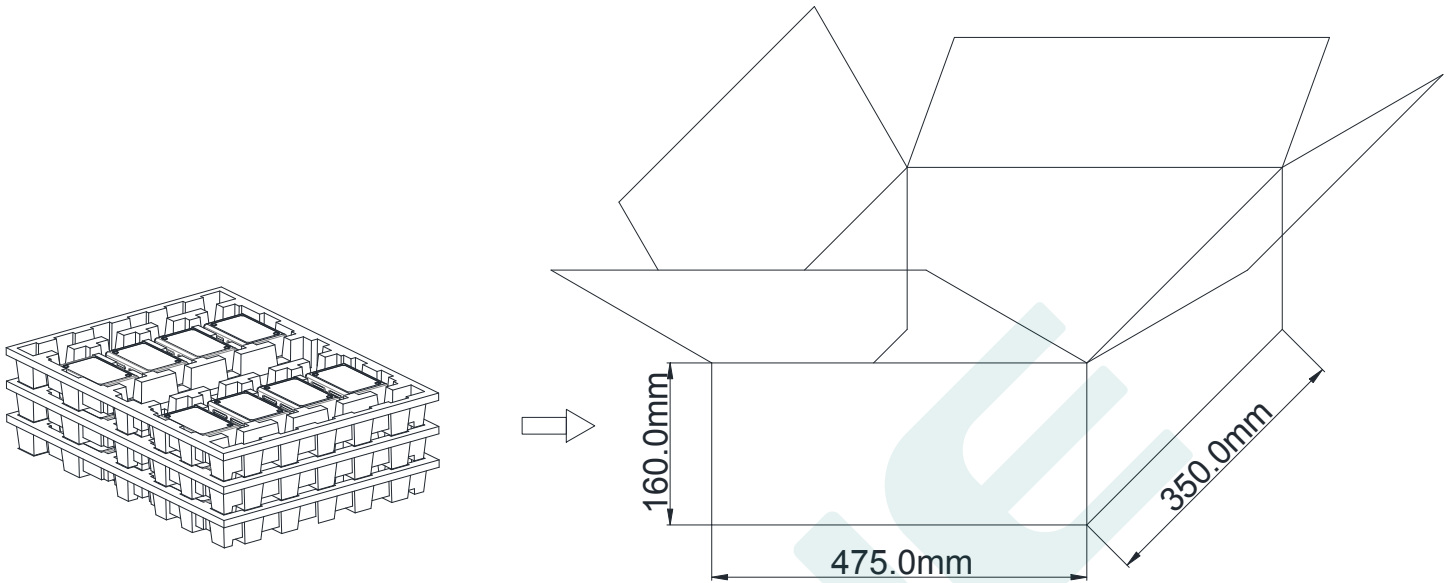

Note: One Carton 3 layers and 8 pcs each layer, total 24pcs/carton.

Note:

1. According to the certificate obtained by the LED DRIVER, the LED DRIVER with the English label is sold in Europe, America and India.
2. The LED DRIVER with Chinese label is only used for China market.

Version

DATE	DESCRIPTION	REV.	CHECK
2024.6.25	Initial version.	V1.0	
2025.4.23	1. Adjustment of parameter curves 2. 150Z-56A/P-MXL open circuit voltage changed to 65V, CM changed to 10KV	V1.1	
2025.7.24	Update the Mechanical specification	V1.2	
2025.8.20	1. DL-150Z-107A/P-MXL open circuit voltage changed to 150V 2. DL-150Z-214A/P-MXL open circuit voltage changed to 260V	V1.3	
2026.1.10	1. Adjust the input under-voltage protection description and the "output power vs. input voltage" chart 2. Increase input overvoltage protection description	V1.4	
2026.1.22	Modify the partial voltage content on page 7	V1.5	

MANUFACTURER

EDIT

CHECK

APPROVE