

The logo for DONE, featuring the word "DONE" in a bold, teal, sans-serif font. The letter "D" is stylized with a white circular element on its left side. The logo is enclosed in a thin teal rounded rectangular border.

# MXL Series LED Drivers


---

DL-100Z-A/P-MXL (100K Hours Lifetime)

Specification V2.0

## Features

- Class I structure
- Input voltage:100-277V ~ 50/60Hz
- Efficiency :90%(Typ.)
- Function selection:  
 Fixed current : Adjusted by external potentiometer (A version )  
 Isolated 3-in-1 dimming: 0-10V/PWM/Resistor; Timer dimming (P version)
- Input surge protection: DM 6kV, CM 10kV
- All-Around protection: IUVP/IOVP/SCP/OVP/OTP
- Ingress protection rating: IP67
- Warranty: 5 years

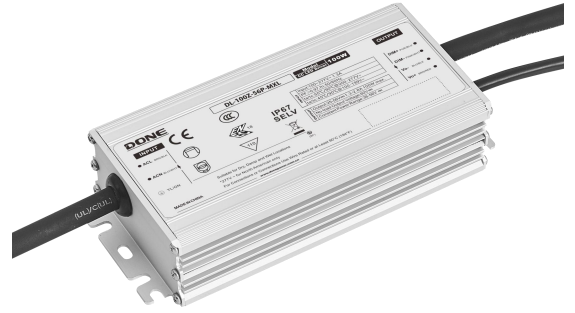

## Applications

- Road lighting
- Industrial lighting
- Stadium lighting
- Landscape lighting
- Horticulture lighting



## Model list

Model NO.	Input voltage	Output power	Output voltage	Output current	Default current	Eff. (Typ.)	THD (Typ.)	PF (Typ.)
DL-100Z-56A-MXL DL-100Z-56P-MXL	100-277Vac	100W	25-56Vdc	1.3-2.8A	2.4A	90%	7%	0.97
DL-100Z-72A-MXL DL-100Z-72P-MXL	100-277Vac	100W	35-72Vdc	1.39-2.1A	1.9A	90%	7%	0.97
DL-100Z-143A-MXL DL-100Z-143P-MXL	100-277Vac	100W	71-143Vdc	0.5-1.05A	0.7A	90%	7%	0.97

### Note :

1. Test conditions for the above parameters: At 100%Load 30 minutes,230 Vac;
2. The maximum output power is 100W ; please refer to the output power Vs. input voltage curve.

## Input characteristics

Parameter	Min	Typ.	Max	Note
Input AC voltage range	90Vac	-	305Vac	Refer to output power Vs. input voltage derating curve
Input frequency	47Hz	50/60Hz	63Hz	
Leakage current	-	-	0.70mA	IEC 60598-1; 240Vac/60Hz
	-	-	0.75MIU	UL 8750; 277Vac/60Hz
Power factor(PF)	0.95	0.97	-	At 100~240Vac and 70%~100% load
	0.88	0.95	-	At 277Vac and 70%~100% load
THD	-	7%	20%	At 100~277Vac and 70%~100% load
Input current	-	-	1.3A	At 100Vac and 100% load
Inrush current	-	-	70A	At 230Vac and 25°C cold start

## Output characteristic

Parameter	Min	Typ.	Max	Note
Efficiency				100% load @100Vac
DL-100Z-56A/P-MXL	85.0%	86.0%		Io=1.79A
DL-100Z-72A/P-MXL	85.0%	86.0%	-	Io=1.39A
DL-100Z-143A/P-MXL	85.0%	86.0%		Io=0.70A
Efficiency				100% load @230Vac
DL-100Z-56A/P-MXL	89.0%	90.0%		Io=1.79A
DL-100Z-72A/P-MXL	89.0%	90.0%	-	Io=1.39A
DL-100Z-143A/P-MXL	89.0%	90.0%		Io=0.70A
Efficiency				100% load @277Vac
DL-100Z-56A/P-MXL	89.5%	90.5%		Io=1.79A
DL-100Z-72A/P-MXL	89.5%	90.5%	-	Io=1.39A
DL-100Z-143A/P-MXL	89.5%	90.5%		Io=0.70A
Output voltage range				100%load output voltage range:
DL-100Z-56A/P-MXL	25V		56V	36-56V
DL-100Z-72A/P-MXL	35V	-	72V	48-72V
DL-100Z-143A/P-MXL	71V		143V	95-143V
Open circuit voltage				
DL-100Z-56A/P-MXL	-	-	65V	
DL-100Z-72A/P-MXL			100V	
DL-100Z-143A/P-MXL			180V	
Output current range				Default current :
DL-100Z-56A/P-MXL	1.3A		2.8A	2.4A
DL-100Z-72A/P-MXL	1.39A	-	2.1A	1.9A
DL-100Z-143A/P-MXL	0.5A		1.05A	0.7A

## Output characteristic

Parameter	Min	Typ.	Max	Note
Output current tolerance	-5%	-	+5%	100% load
Output Current Ripple(PK-AV)	-	5% Iomax	10% Iomax	100%load , 20 MHz BW Ripple current = (Peak - Average) / Average
Start-up overshoot current	-	-	10%	100% load
Line regulation	-5%	-	+5%	100% load
Load regulation	-5%	-	+5%	60%-100% load
Turn-on delay time	-	-	1.0s	100% load@230Vac

**Note:** The output current range is limited by the input and output voltage, please refer to I-V Work area curve

## Dimming characteristic ( P version)

Dimming	Parameter	Min	Typ.	Max	Note
0-10V Dimming ( Optional )	Safe operating voltage	0V	-	10V	Output current of the dimming port is 150 $\mu$ A (Typ.)
	Dimming range	10%	-	100%	
	Recommended dimming input range	0V	-	10V	
	Turn-on voltage	0.6V	0.8V	1.0V	Afterglow maybe appear after dimming off , need test with lighting fixture
	Turn-off voltage	0.4V	0.5V	0.6V	
PWM Dimming ( Optional )	PWM in high level	9.5V	-	10.5V	
	PWM in low level	0V	-	0.3V	
	PWM in frequency scope	300Hz	-	2000Hz	-
	PWM in duty cycle	1%	-	99%	-
	Turn-on duty cycle	6%	8%	10%	
	Turn-off duty cycle	4%	5%	6%	
Resistor Dimming ( Optional )	External resistor value	10K $\Omega$	-	100K $\Omega$	-
	Dimming range	10%	-	100%	Full power output at 99% duty cycle
Timer Dimming (Optional)	3 modes:Timing,Virtual Midnight,Self-adaptive				Default close, Set by the programmer
Output lumen compensation	Setting the output power with reference to the luminaire life				Default close, Set by the programmer

Note: Version P supports 0-10V dimming (with OV controllable). The maximum voltage that the dimming port can withstand is 12V. If the external power supply voltage exceeds 12V or the signal line is reversed, it will cause damage to the power supply.

## Protection

Parameter		Description			
Input Under Voltage Protection (IUVP)	Under Voltage Protection	70Vac	80Vac	90Vac	Turn off the output when the input voltage falls below protection voltage
	Under Voltage Recovery	75Vac	85Vac	95Vac	Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage.
Input Over Voltage Protection (IOVP)	Over Voltage Protection	310Vac	325Vac	350Vac	Turn off the output when the input voltage exceeds protection voltage.
	Over Voltage Recovery	300Vac	315Vac	330Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	-	-	350Vac	The driver can survive input over voltage conditions of up to 350 Vac for a total of 8 hours without damage.
Output overload protection		Hiccup mode , recovers automatically after fault condition is removed.			
Output short circuit protection		Hiccup mode , recovers automatically after fault condition is removed			
Over temperature protection		Self-recovery type , when the casing temperature is greater than 90°C, the output power decreases gradually.			
Output over-voltage protection		Self-recovery type, automatically recovered after abnormal conditions are removed			

**Note:** All parameters should be measured at a 230Vac/50Hz input voltage, with a rated load unless otherwise specified.

## Environmental

Categories	Parameter
Operating temperature Ta	-40°C ~ +45°C@100-199Vac -40°C ~ +55°C@200-277Vac
Operating case temperature for Safety Tc_s	-40°C ~ +90°C
Operating case temperature for Warranty Tc_w	-40°C ~ +75°C, 10% ~ 95% RH
Storage temperature, humidity	-40°C ~ +80°C, 10% ~ 95% RH
Resistant to vibration	10Hz ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each
MTBF	200,000 hours (MIL-HDBK-217F), Ta=25°C, 230Vac, 80% load
Lifetime	100,000 hours @Tc≤70°C, 230Vac, 80% Load

## Safety

Safety Categories	Area	Standards	Approved
CCC	China	GB/T 19510.1, GB/T 19510.213	√
CE	Europe	EN 61347-1, EN 61347-2-13	√
ENEC		EN 62384	√
CB	CB member state	IEC 61347-1, IEC 61347-2-13	√
SAA	Australia	AS/NZS 61347.1, AS/NZS 61347.2.13	√
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
EAC	Russia	ГОСТ IEC 61347-1-2019 ГОСТ IEC 61347-2-13-2013	√
BIS	India	IS 15885(PART 2/SEC 13)	

## EMC

EMI/EMS Categories	Area	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN IEC 55015 EN 61547 EN IEC 61000-3-2;3-3;4-5	√
EAC	Russia	ГОСТ IEC 61547-2013 ГОСТ CISPR 15-2014 ГОСТ IEC 6100-3-2-2017 ГОСТ IEC 6100-3-3-2015	√
FCC	USA	FCC Part 15 Subpart B	√

## RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

**Safety Test Items:**


Safety Test Item	UL	CE/CB/ENEC	CCC	Note
Input-output	1600Vac	3200Vac	3200Vac	-
Input-Case/Ground	1600Vac	1600Vac	1600Vac	-
Input-Dim	1600Vac	3200Vac	3200Vac	-
Output-Case/Ground				
DL-100Z-56A/P-MXL	500Vac	500Vac	500Vac	-
DL-100Z-72A/P-MXL	1200Vac	500Vac	500Vac	-
DL-100Z-143A/P-MXL	1360Vac	1360Vac	1360Vac	-
Output-Dim				
DL-100Z-56A/P-MXL	1130Vac	500Vac	500Vac	-
DL-100Z-72A/P-MXL	1200Vac	500Vac	500Vac	-
DL-100Z-143A/P-MXL	1360Vac	2720Vac	2720Vac	-
Dim-Case	500Vac	500Vac	500Vac	-
Insulation Resistance	≥10MΩ			Input-Dim, Test voltage:500Vdc
Ground Resistance	≤0.1Ω			25A/1min; Ta=25°C±10°C

**Note:** Version P supports 0-10V dimming (with OV controllable). The maximum voltage that the dimming port can withstand is 12V. If the external power supply voltage exceeds 12V or the signal line is reversed, it will cause damage to the power supply.

## I-V Working area

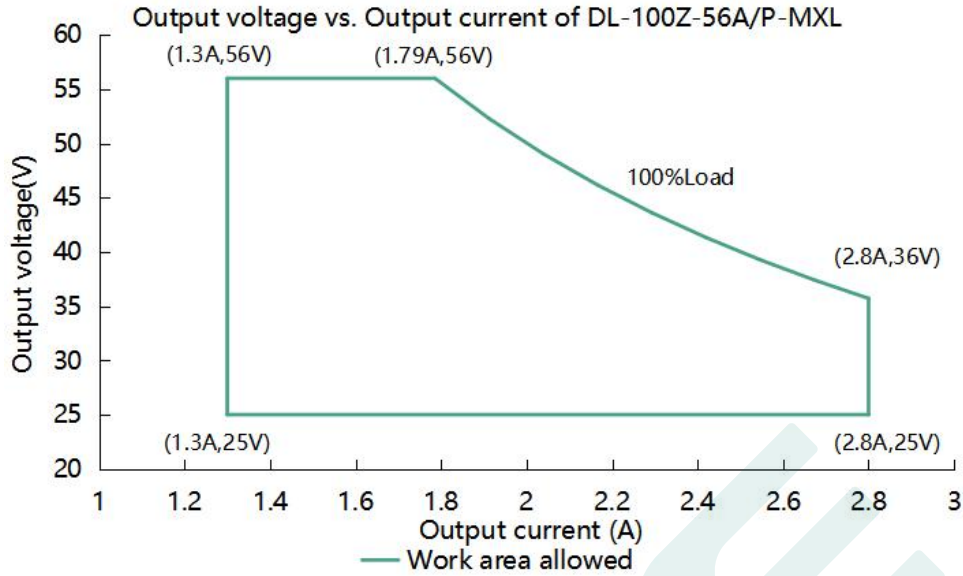


Load	Output								
Output Voltage	25V	29V	33V	36V	42V	46V	48V	52V	56V
Output Current	2.80A	2.80A	2.80A	2.80A	2.38A	2.17A	2.10A	1.92A	1.79A
Output Power	70.0W	81.2W	92.4W	100.0W	100.0W	100.0W	100.0W	100.0W	100.0W

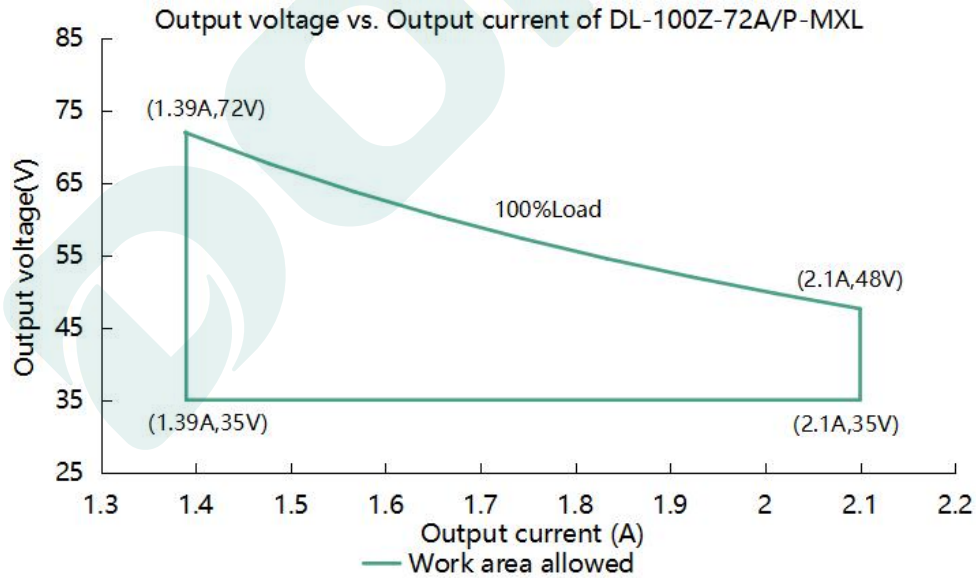


Load	Output								
Output Voltage	35V	40V	44V	48V	55V	60V	64V	68V	72V
Output Current	2.10A	2.10A	2.10A	2.10A	1.82A	1.67A	1.56A	1.47A	1.39A
Output Power	73.5W	84.0W	92.4W	100.0W	100.0W	100.0W	100.0W	100.0W	100.0W

**I-V Working area**

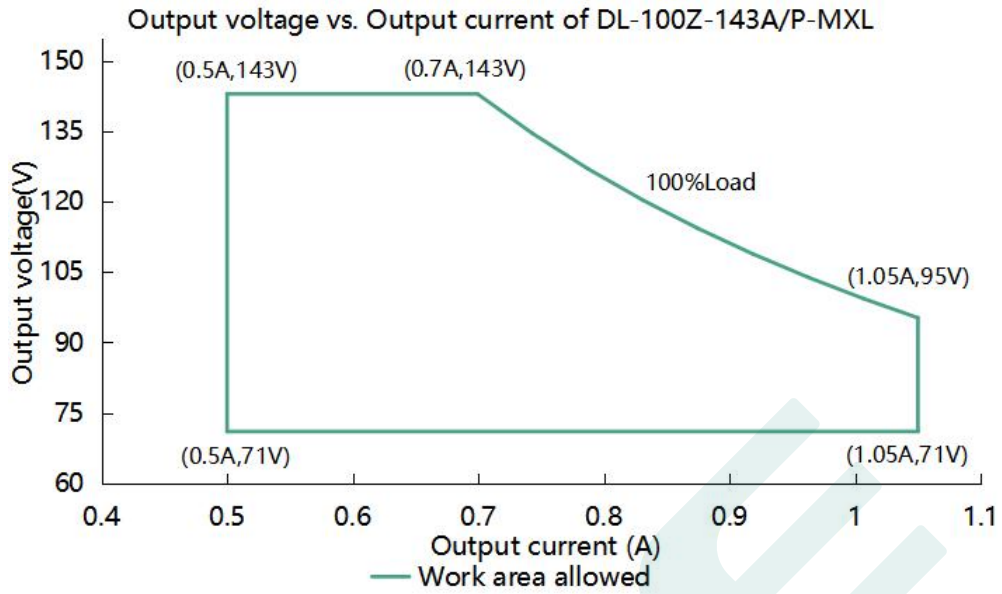


Load	Output								
Output Voltage	71V	78V	86V	95V	100V	110V	115V	120V	143V
Output Current	1.05A	1.05A	1.05A	1.05A	1.00A	0.90A	0.87A	0.83A	0.70A
Output Power	74.5W	81.9W	90.3W	100.0W	100.0W	100.0W	100.0W	100.0W	100.0W

**Inrush current**

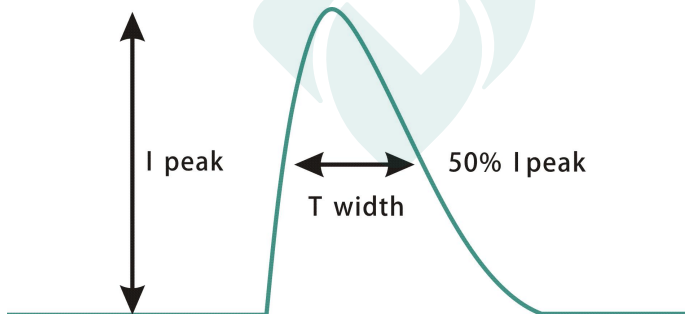


Input voltage	Peak current	T(@50% Peak current)
100V	23.5A	100US
230V	54.0A	100US
277V	65.0A	100US


Output power vs. Input voltage ( DL-100Z-MXL )

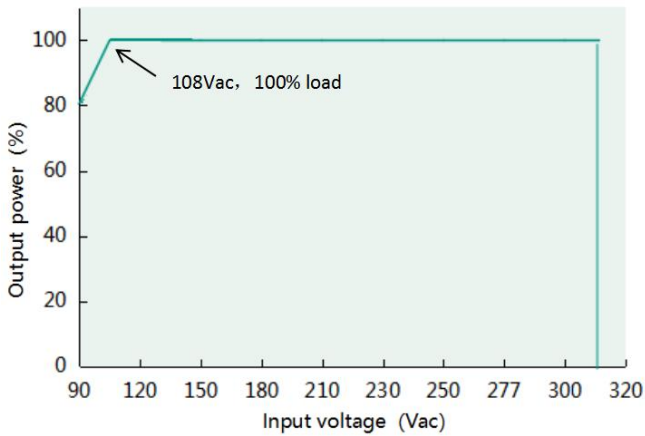


Eff. vs. Load ( DL-100Z-56A/P-MXL ) ( Io=1.79A )

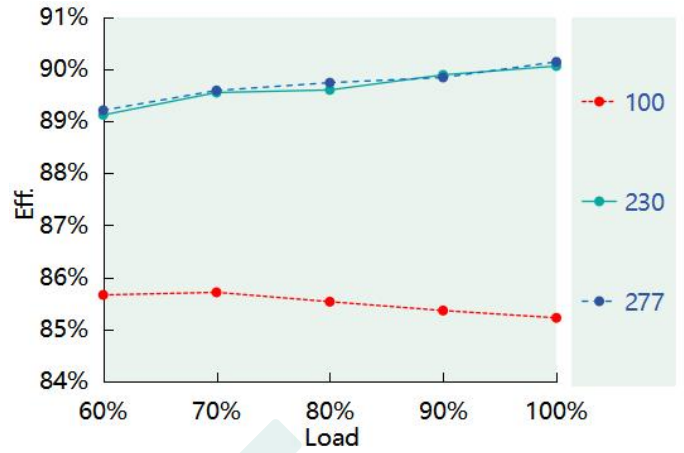


Eff. vs. Load ( DL-100Z-72A/P-MXL ) ( Io=1.39A )

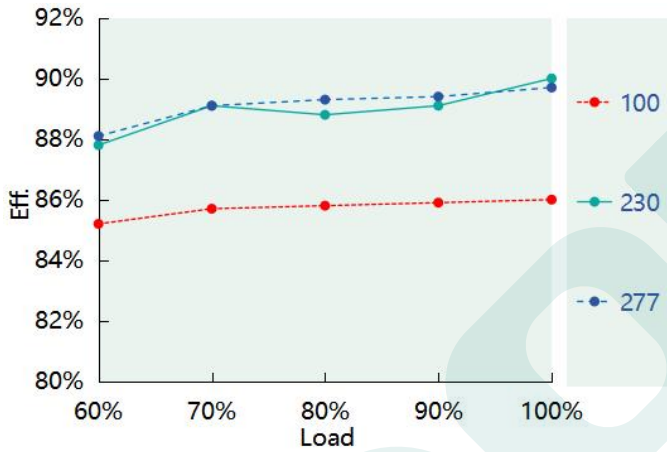


Eff. vs. Load ( DL-100Z-143A/P-MXL ) ( Io=0.7A )

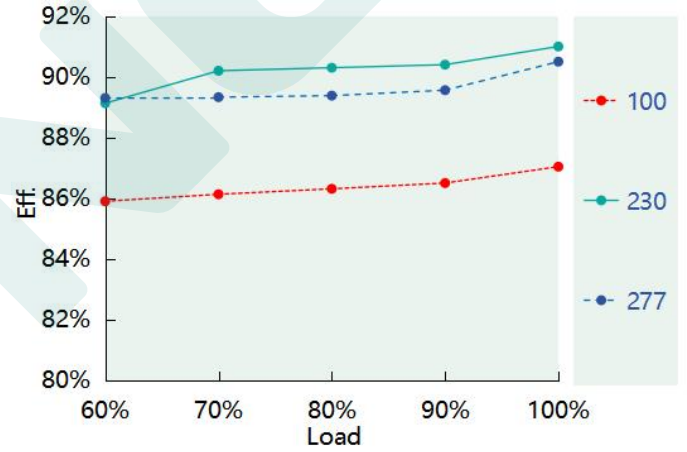


Power Factor vs. Load ( DL-100Z-56A/P-MXL )

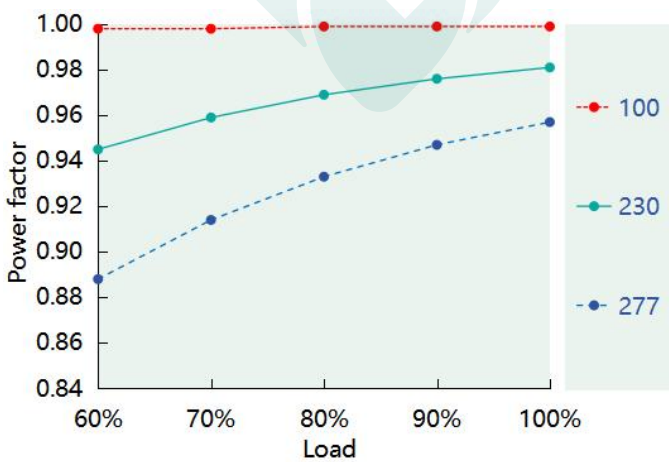


Power Factor vs. Load ( DL-100Z-72A/P-MXL )

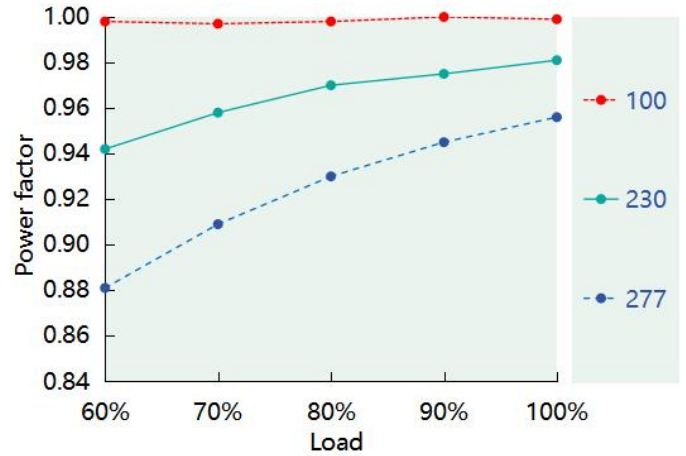


Power Factor vs. Load ( DL-100Z-143A/P-MXL )

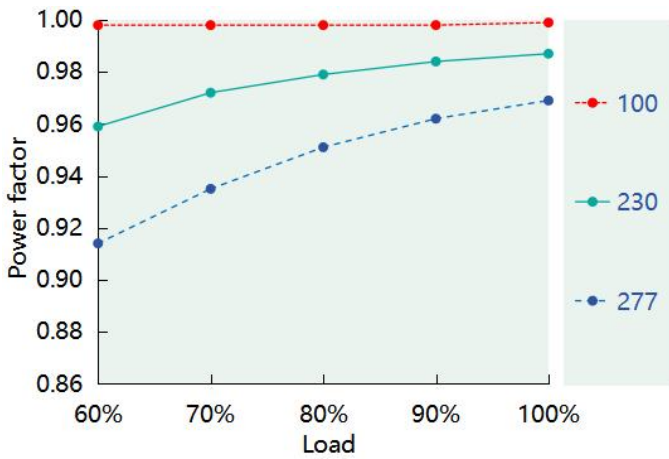


THD vs. Load ( DL-100Z-56A/P-MXL )

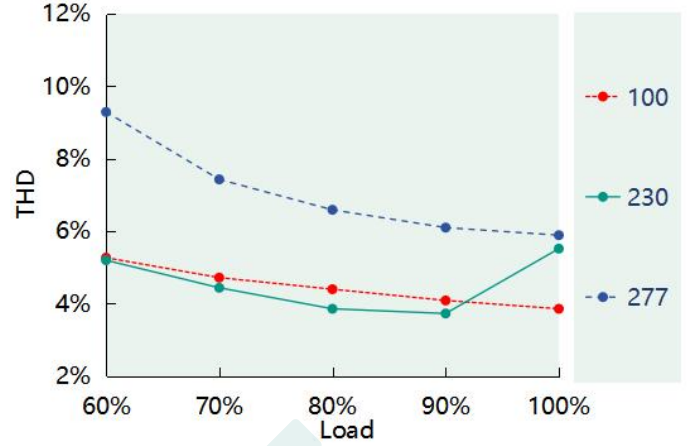


THD vs. Load ( DL-100Z-72A/P-MXL )

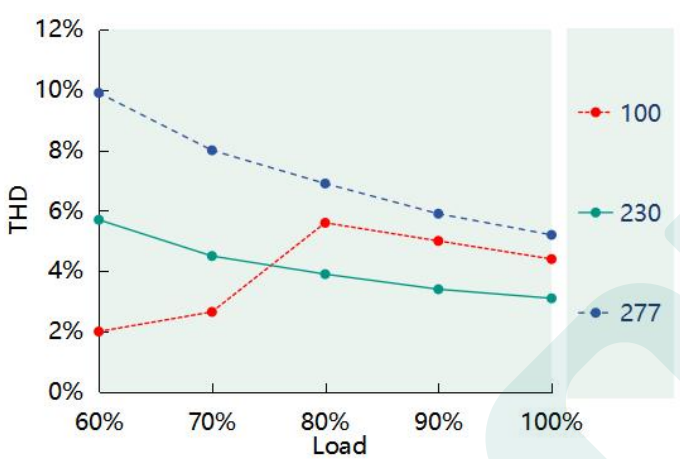


THD vs. Load ( DL-100Z-143A/P-MXL )

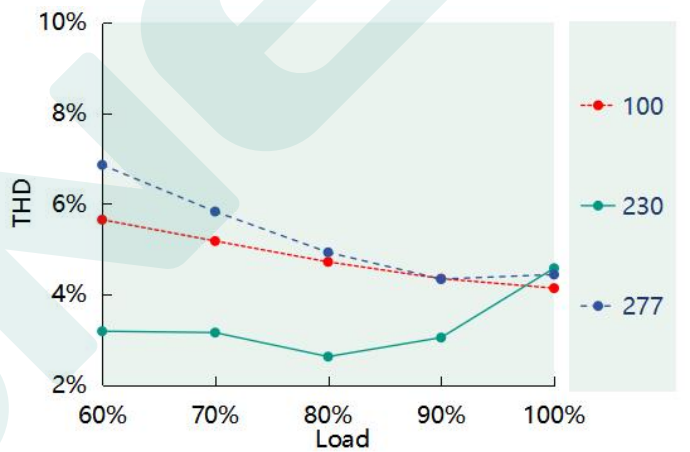

Tcase vs. Lifetime

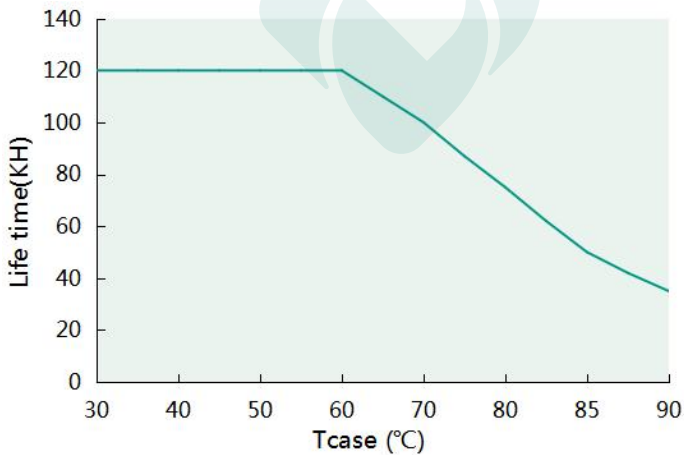

Output power vs. Tcase


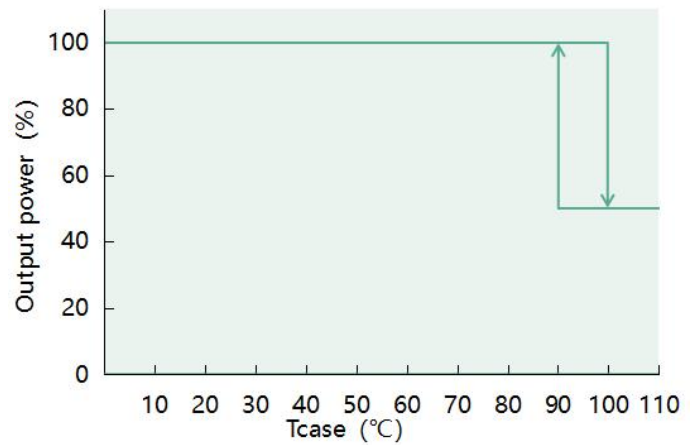


## Dimming operation



### 3-in-1 dimming function (P version only)

Connect a 0-10V Dimmer or 10V PWM signal or resistor between DIM+ and DIM-



• 0-10V dimming:

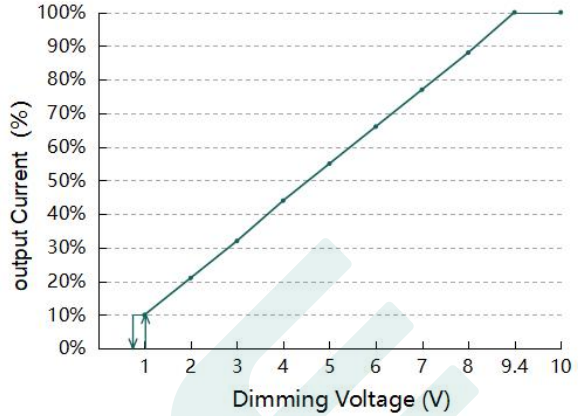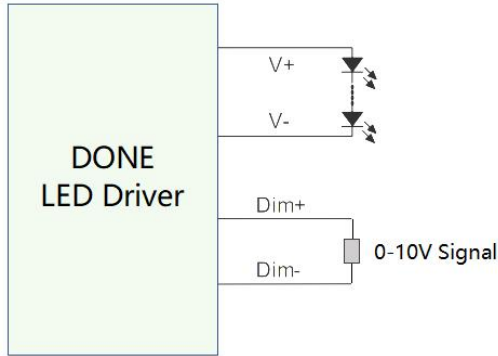

• PWM dimming :

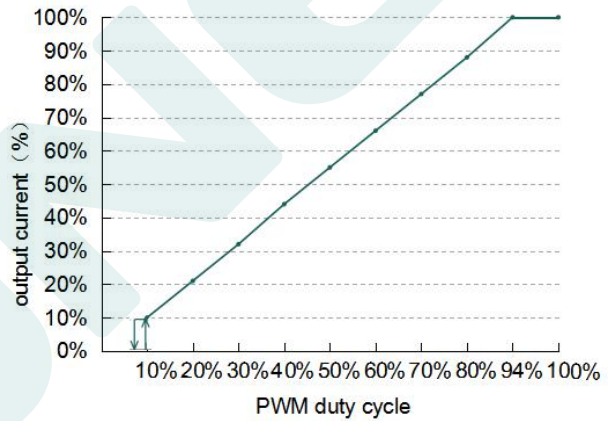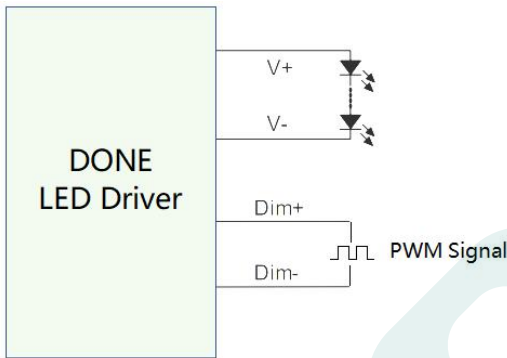

• Resistor Dimming:

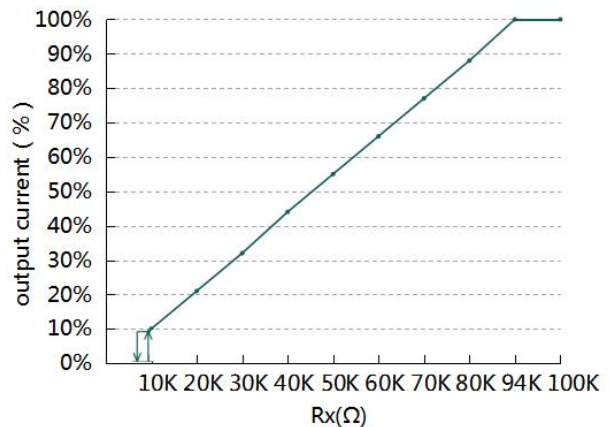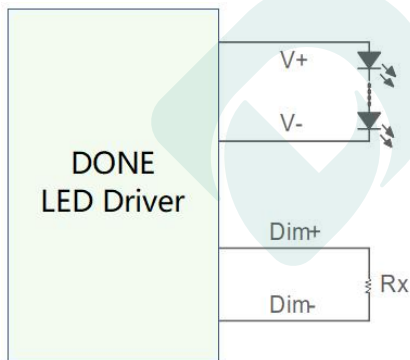

**Remark:**

1. Positive and negative logic dimming can be programmed.
2. Dimming-off only applies to positive logic.

## Programmable Connections

Suitable for MXG, MXL, MXC, MXS, MAS, PXS Series.


### Mode 1



#### Visual Programming

1. Set the output parameters through the control signal line, set the output current and 0-5V/0-10V/3-in-1/PWM optional.
2. Timer dimming, Traditional/Self-adaptive midnight/Self-adaptive percentage optional, support up to 6 segments;
3. Set output output lumen compensation (OLC);
4. Set the lifetime warning
5. Set the OTP parameter
6. After setting is completed, then click the Save button, download it to the offline programmer and the driver setup is complete.

### Mode 2

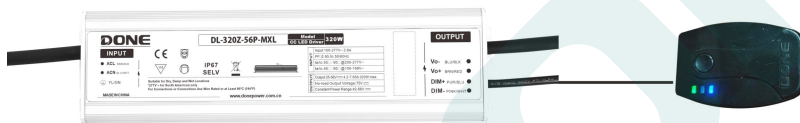

#### Off-line programmable :


1. Download the program to the programmer;
2. Connect the dimming wire with the programmer, press the programmer button, the programmer will give you a Beep and indicator light turns green to tell you the installation completed.

For more details, Please see the “[DONE POWER OFFLINE PROGRAMMING TOOL V2.0](#)” file.


**Mechanical specification**

Size ( mm )      L130\*W63\*H33

**DL-100Z-56A/72A/143A-MXL**

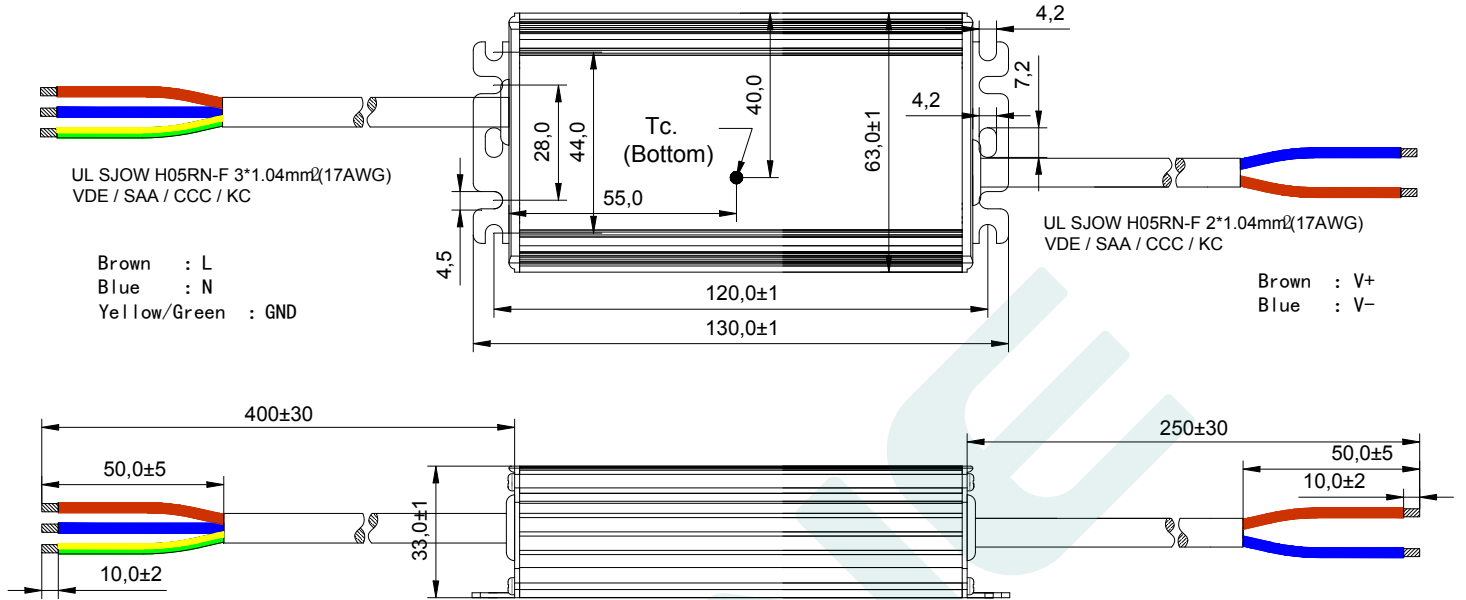

**DL-100Z-56P/72P/143P-MXL**

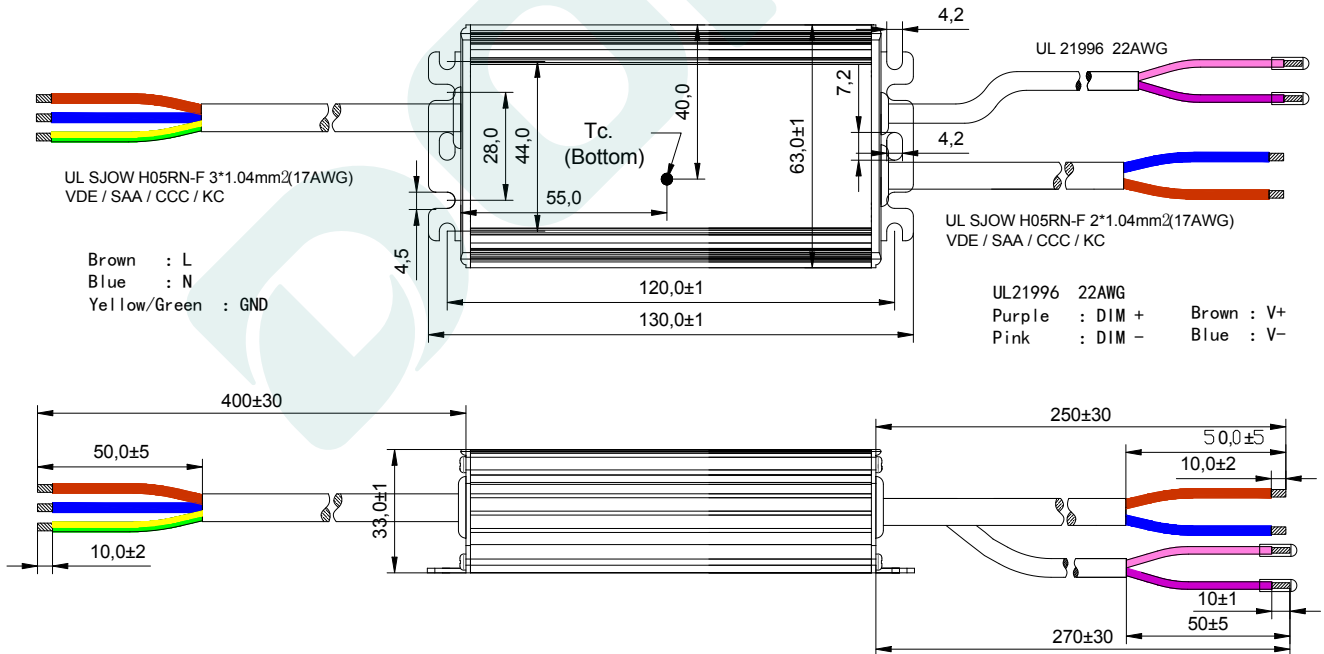


**Weight**

Weight      500g

## Packaging

Packaging ( mm )      L475\*W350\*H160

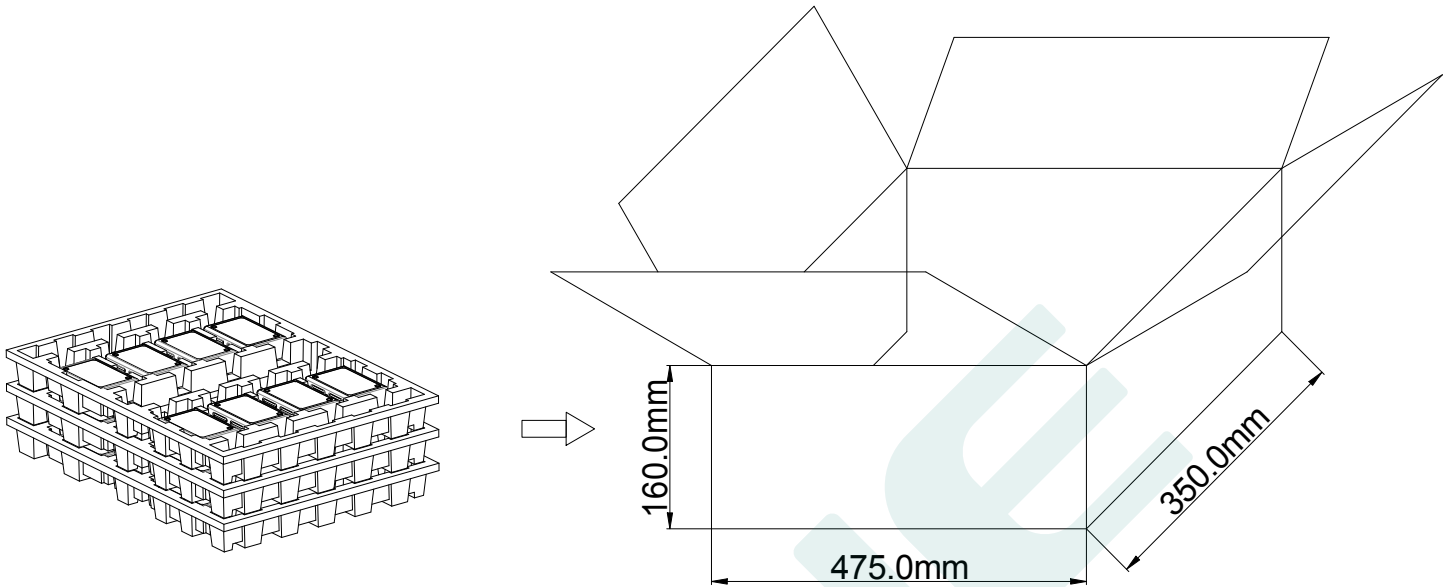

Note : One Carton 3 layers and 8 pcs each layer, total 24pcs/carton.

### Note:

1. According to the certificate obtained by the LED DRIVER, the LED DRIVER with the English label is sold in Europe, America and India.
2. The LED DRIVER with Chinese label is only used for China market.

## Version

DATE	DESCRIPTION	REV.	CHECK
2024.12.22	Initial version.	V1.0	
2025.1.6	1. 100Z-56A/P-MXL open circuit voltage changed to 65V, CM changed to 10KV 2. The maximum value of THD changed to 20%	V1.1	
2025.3.22	1. 100Z-143A/P-MXL open circuit voltage changed to 180V 2. Adjust the input under-voltage protection description and the "output power vs. input voltage" chart 3. Increase input overvoltage protection description	V1.2	
2025.4.11	Modify the description of Lifetime and Tcase VS Lifetime" Curve	V2.0	

## MANUFACTURER

EDIT

CHECK

APPROVE

--	--	--